

# PLL frequency synthesizer for tuners

## BU2611A / BU2611AF / BU2611AFS

The BU2611 PLL frequency synthesizers work up through the FM band. They feature built-in RF amps with low power dissipation and high sensitivity.

### ●Applications

Tuners (Mini components, radio cassette players, radio equipment, etc.)

### ●Features

- 1) Built-in high-speed prescaler can divide 130MHzVCO.
- 2) In addition to the reference FM and AM, also offers the following 7 frequencies : 100kHz, 50kHz, 25kHz, 10kHz, 9kHz, 5kHz, and 1kHz.
- 3) 3-bit output port (open drain).
- 4) Clock output (400kHz).
- 5) Time base output (8Hz).
- 6) Serial data input (CE, CK, DA).

### ●Absolute maximum ratings (Ta = 25°C)

| Parameter                |                    | Symbol            | Limits                    | Unit | Conditions                  |
|--------------------------|--------------------|-------------------|---------------------------|------|-----------------------------|
| Power supply voltage     |                    | V <sub>DD</sub>   | -0.3~+7.0                 | V    |                             |
| Maximum input voltage    |                    | V <sub>IN</sub>   | -0.3~V <sub>DD</sub> +0.3 | V    | CE, CK, CA, XIN, FMIN, AMIN |
| Maximum output voltage 1 |                    | V <sub>OUT1</sub> | -0.3~+10.0                | V    | P1, P2, P3, P4              |
| Maximum output voltage 2 |                    | V <sub>OUT2</sub> | -0.3~V <sub>DD</sub> +0.3 | V    | PD1, PD2                    |
| Maximum output current   |                    | I <sub>OUT</sub>  | 0~+4.0                    | mA   | P1, P2, P3, P4              |
| Power dissipation        | BU2611A            | Pd                | 1000 *1                   | mW   |                             |
|                          | BU2611AF/BU2611AFS |                   | 500 *2                    |      |                             |
| Operating temperature    |                    | T <sub>opr</sub>  | -25~+75                   | °C   |                             |
| Storage temperature      |                    | T <sub>stg</sub>  | -55~+125                  | °C   |                             |

\*1 Reduced by 10mW for each increase in Ta of 1°C over 25°C.

\*2 Reduced by 5mW for each increase in Ta of 1°C over 25°C.


### ●Recommended operating conditions

| Parameter            | Symbol          | Min. | Typ. | Max. | Unit |
|----------------------|-----------------|------|------|------|------|
| Power supply voltage | V <sub>DD</sub> | 4.0  | -    | 6.0  | V    |

# BU2611A / BU2611AF / BU2611AFS

## Audio ICs

### ●Block diagram

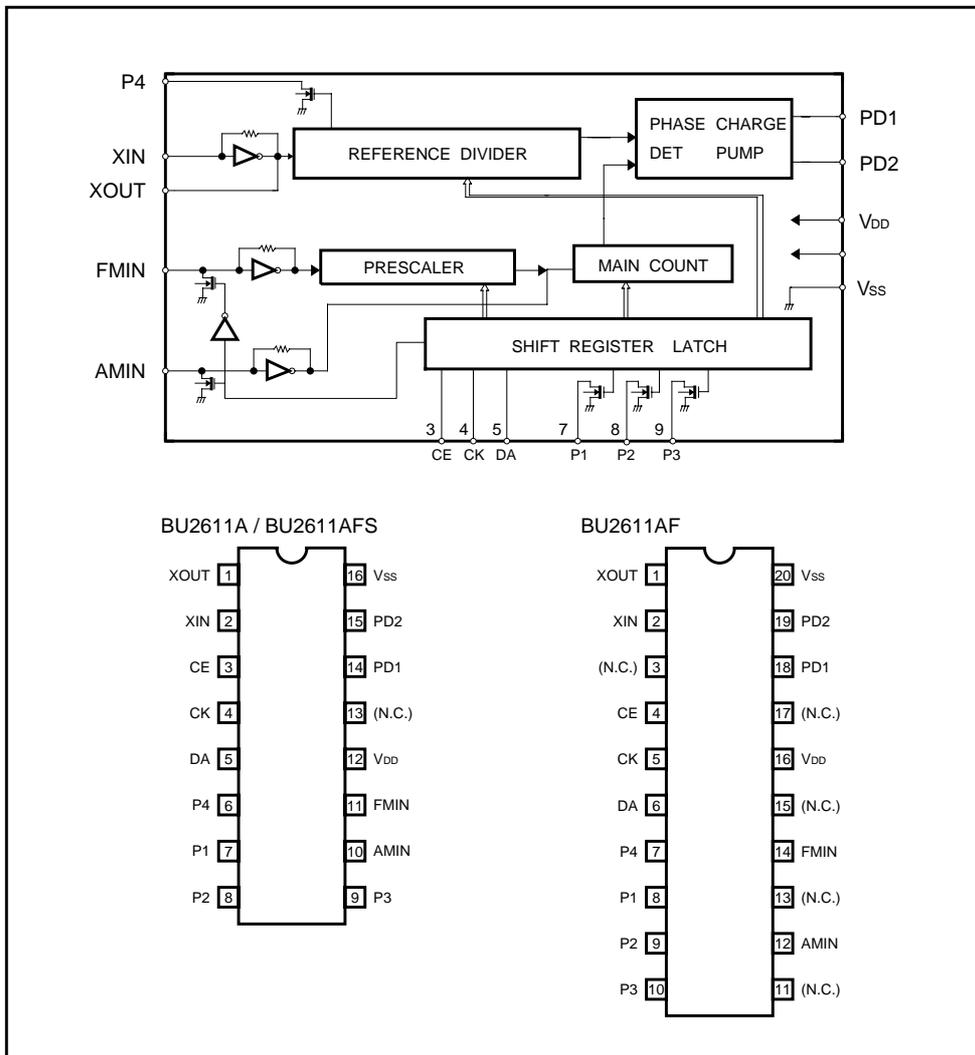

### ●Pin descriptions

| Pin name   | Functions                        |
|------------|----------------------------------|
| P4         | Controller clock (400kHz) output |
| XIN, XOUT  | X'tal oscillation (7.2MHz)       |
| FMIN, AMIN | Local oscillation signal input   |
| CE, CK, DA | Data input                       |
| P1, P2, P3 | Output port                      |
| V          | Power supply                     |
| PD1, PD2   | Charge pump output               |



# BU2611A / BU2611AF / BU2611AFS

## Audio ICs

### ●Electrical characteristics (unless otherwise noted, Ta = 25°C, VDD = 5.0V)

| Parameter                   | Symbol              | Min. | Typ. | Max. | Unit | Conditions   |
|-----------------------------|---------------------|------|------|------|------|--|
| Power supply current        | I <sub>DD1</sub>    | –    | 4.8  | –    | mA   | F <sub>IN</sub> =130MHz, 100mVrms                    |
| Circuit current w/o signal  | I <sub>DD2</sub>    | –    | 300  | –    | μA   | No input, PLL=OFF                                    |
| Input high level voltage    | V <sub>IH</sub>     | 3.5  | –    | –    | V    | CE, CK, DA terminals                                 |
| Input low level voltage     | V <sub>IL</sub>     | –    | –    | 1.5  | V    | CE, CK, DA terminals                                 |
| Output low level voltage 1  | V <sub>OL1</sub>    | –    | 0.4  | –    | V    | P1, P2, P3, P4 I <sub>OUT</sub> =2.0mA               |
| Off level leakage current 1 | I <sub>OFF1</sub>   | –    | –    | 1.0  | μA   | P1, P2, P3, P4 V <sub>OUT</sub> =10V                 |
| Output high level voltage   | V <sub>OH</sub>     | –    | 0.25 | –    | V    | PD1, PD2 I <sub>OUT</sub> =-1.0mA                    |
| Output low level voltage 2  | V <sub>OL2</sub>    | –    | 0.15 | –    | V    | PD1, PD2 I <sub>OUT</sub> =1.0mA                     |
| Off level leakage current 2 | I <sub>OFF2</sub>   | 100  | –    | 100  | nA   | PD1, PD2 V <sub>OUT</sub> =V <sub>DD</sub>           |
| Off level leakage current 3 | I <sub>OFF3</sub>   | -100 | –    | –    | nA   | PD1, PD2 V <sub>OUT</sub> =V <sub>SS</sub>           |
| Input frequency 1           | F <sub>IN1</sub>    | –    | 7.2  | –    | MHz  | XIN, sine wave, C coupling                           |
| Input frequency 2           | F <sub>IN2</sub>    | 10   | –    | 130  | MHz  | FMIN, sine wave, C coupling V <sub>IN</sub> =80mVrms |
| Input frequency 3           | F <sub>IN3</sub>    | 0.5  | –    | 20   | MHz  | AMIN, sine wave, C coupling V <sub>IN</sub> =80mVrms |
| Input amplitude             | F <sub>INMax.</sub> | 0.08 | –    | 1.5  | Vrms | XIN, FMIN, AMIN, sine wave, C coupling               |

### ●Data format

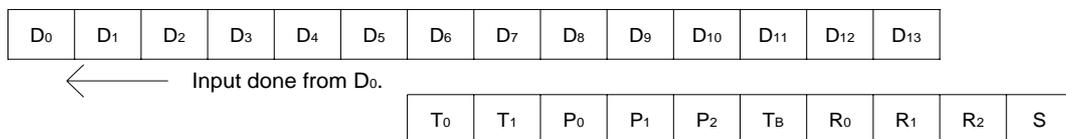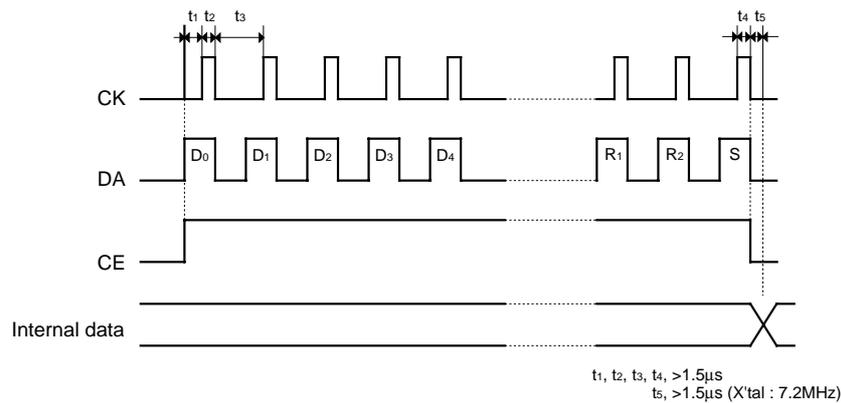

(1) Division data : For D<sub>0</sub> through D<sub>13</sub> (For AMN, use D<sub>4</sub> through D<sub>13</sub>).

| D <sub>0</sub> | D <sub>1</sub> | D <sub>2</sub> | D <sub>3</sub> | D <sub>4</sub> | D <sub>5</sub> | D <sub>6</sub> | D <sub>7</sub> | D <sub>8</sub> | D <sub>9</sub> | D <sub>10</sub> | D <sub>11</sub> | D <sub>12</sub> | D <sub>13</sub> |                      |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|-----------------|----------------------|
| 1              | 1              | 0              | 0              | 1              | 0              | 1              | 0              | 0              | 0              | 1               | 0               | 0               | 0               | →FMIN frequency=1107 |
| X              | X              | X              | X              | 0              | 1              | 1              | 1              | 1              | 0              | 0               | 1               | 1               | 1               | →AMIN frequency=926  |

## Audio ICs

(2) Test data : T<sub>0</sub> through T<sub>1</sub> are taken as (0, 0).

(3) P<sub>0</sub>, P<sub>1</sub>, P<sub>2</sub>, P<sub>3</sub>, TB : port output, time base output

| Data           |                |                |    | Port output    |                |                |
|----------------|----------------|----------------|----|----------------|----------------|----------------|
| P <sub>0</sub> | P <sub>1</sub> | P <sub>2</sub> | TB | P <sub>1</sub> | P <sub>2</sub> | P <sub>3</sub> |
| 0              | 0              | 0              | 0  | *              | *              | *              |
| 0              | 0              | 1              | 0  | 0              | 0              | 1              |
| 0              | 1              | 0              | 0  | 0              | 1              | 0              |
| 0              | 1              | 1              | 0  | 0              | 1              | 1              |
| 1              | 0              | 0              | 0  | 1              | 0              | 0              |
| 1              | 0              | 1              | 0  | 1              | 0              | 1              |
| 1              | 1              | 0              | 0  | 1              | 1              | 0              |
| 1              | 1              | 1              | 0  | 1              | 1              | 1              |
| 0              | 0              | 0              | 1  | TB             | *              | *              |
| X              | 1              | 0              | 1  | TB             | 1              | 0              |
| X              | 0              | 1              | 1  | TB             | 0              | 1              |
| X              | 1              | 1              | 1  | TB             | 1              | 1              |
| 1              | 0              | 0              | 1  | TB             | 0              | 0              |

\* : Determined on the basis of R<sub>0</sub> - R<sub>2</sub>.

X : Irrelevant

TB: 8 Hz

(4) R<sub>0</sub>, R<sub>1</sub>, R<sub>2</sub>, standard frequency data


| Data           |                |                |                    | Port output    |                |                |
|----------------|----------------|----------------|--------------------|----------------|----------------|----------------|
| R <sub>0</sub> | R <sub>1</sub> | R <sub>2</sub> | Standard frequency | P <sub>1</sub> | P <sub>2</sub> | P <sub>3</sub> |
| 0              | 0              | 0              | 100kHz             | 1              | 1              | 0              |
| 0              | 0              | 1              | 50kHz              | 1              | 1              | 0              |
| 0              | 1              | 0              | 25kHz              | 1              | 1              | 0              |
| 0              | 1              | 1              | 5kHz               | 0              | 0              | 1              |
| 1              | 0              | 0              | 10kHz              | 1              | 0              | 1              |
| 1              | 0              | 1              | 9kHz               | 1              | 0              | 1              |
| 1              | 1              | 0              | 1kHz               | 0              | 1              | 1              |
| 1              | 1              | 1              | 5kHz               | 0              | 0              | 1              |

(5) S : input selection data 1 : FMIN 0 : AMIN

# BU2611A / BU2611AF / BU2611AFS

## Audio ICs

### ●External dimensions (Units : mm)

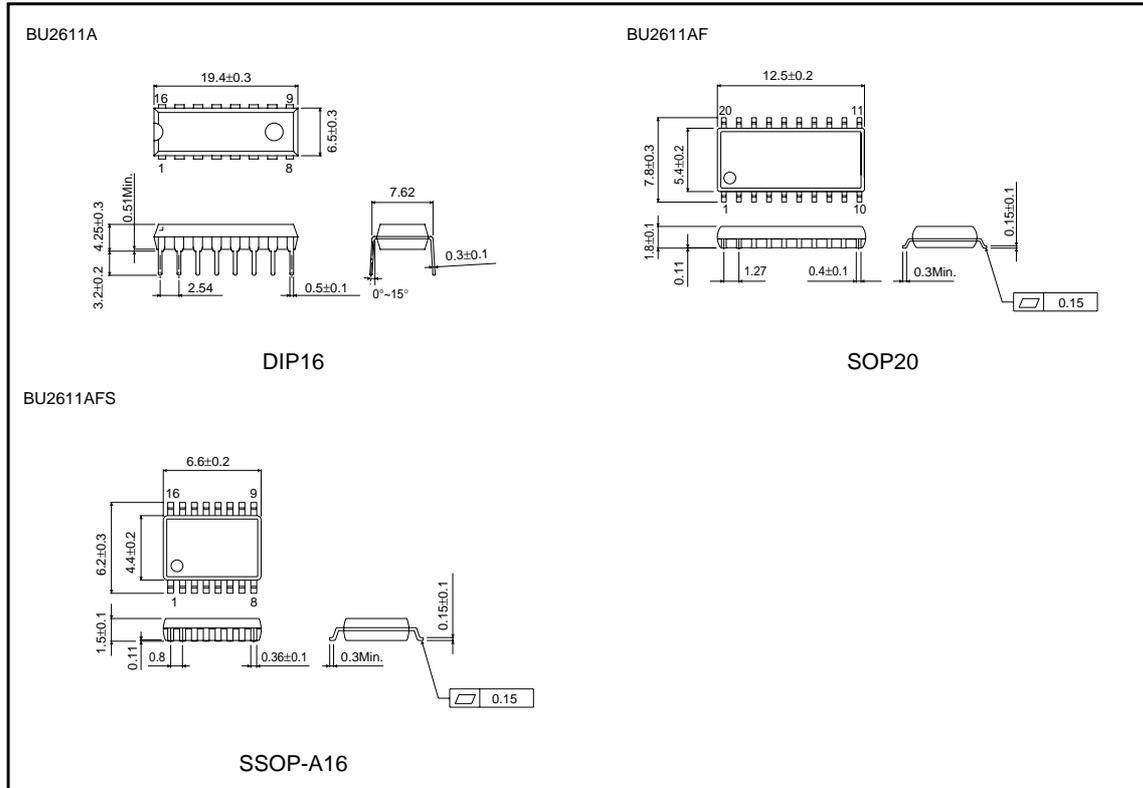

### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.  
Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

#### About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.