


POSITION	10	14	16	20	24	26
A	31.96	37.10	39.62	44.74	49.82	52.22
B	10.16	15.24	17.78	22.86	27.94	30.48
C	17.96	23.04	25.58	30.66	35.74	38.28
D	21.84	26.92	29.46	34.54	39.62	42.16
E	25.40	30.48	33.02	38.10	43.18	48.26

POSITION	30	34	40	50	60	64
A	57.46	62.52	70.18	82.74	95.68	100.70
B	35.56	40.64	48.26	60.96	73.66	78.74
C	43.58	48.44	56.60	68.76	81.45	86.54
D	46.74	52.32	59.94	72.64	85.34	90.42
E	53.26	58.42	66.04	80.96	93.66	98.74

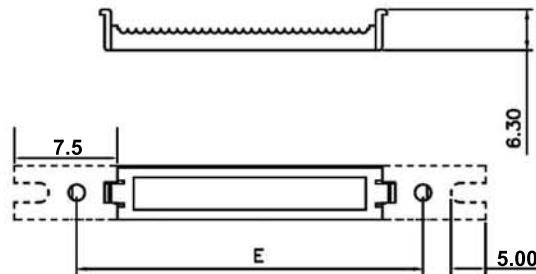


Materials:

- Insulator: Polyester, UL 94V-0
- Standard: PBT
- Contact Material: Copper Alloy
- Underplate: Nickel




Electrical:

- Insulation Resistance: 5000MΩ Min.
- Rating Current: 3.0A Max.
- Dielectric Withstanding: 1,000V AC at 1 Minute
- Operating Temperature: -40°C ~ +105°C
- Contact Area: 100μ" Tin/Lead Free (Matte Tin)

AWHxG-02x2-IDC-R

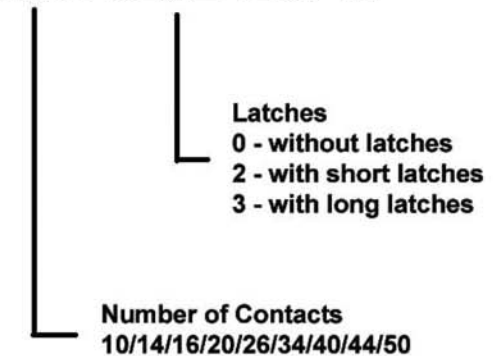

10. LATCH OPTION:



⊗ = Assmann Logo



ITEM NO

AWHxG-02x2-IDC-R

TITLE

Dual Row Header, Pitch 2.54MM, IDC Type

ASSMANN
 Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2009 by Assmann Electronic Components
 All International Rights Reserved