



• P5K



• P5KS

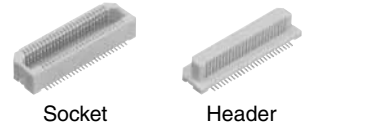

Note) The external appearance and PC board pattern differs for the P5K and P5KS series.

Compliance with RoHS Directive
<http://www.nais-e.com/>

FEATURES

1. The product lineup consists of 3.0 mm, 3.5 mm, 4.0 mm, 4.5 mm, 5.0 mm, 5.5 mm, 6.0 mm, 6.5 mm, 7.0 mm, 8.0 mm, and 9.0 mm.

Type	Mated height	Notes
P5K	3 mm, 3.5 mm	The external appearance and PC board pattern differs for the P5K and P5KS series.
P5KS	4 mm, 4.5 mm, 5 mm, 5.5 mm, 6 mm, 6.5 mm, 7 mm, 8 mm, 9 mm	

2. Strong resistance to adverse environments! Utilizes **TOUGH CONTACT** construction for high contact reliability.


TOUGH CONTACT		P5K	P5KS
4 constructions	Bellows contact construction	○	○
	V notch construction	○	○
	Ni barrier construction	○	○
	Porosity treatment	○	○

1) Contacts are highly resistant to shock caused by dropping and employ our original bellows contact construction.

• What is meant by “bellows type” contact?

Rather than two broken-out surfaces, the contact is formed by the surfaces of two rolled plates. This helps the contact hold up better to repeated insertions and removals, while at the same time achieving highly reliable contact.

The roll surfaces are in contact with each other, providing high contact reliability.




Since the contact is formed by bending thin plate, it has a spring-like quality. This construction helps make it resistant to dropping and twisting.

2) V notch construction used for excellent resistance against foreign matters. (P5KS: Available from Nov. 2005)

• V-notch

By making contact with the edges and thus increasing the contact pressure, this product can eliminate flux and other foreign matters more effectively than conventional products, which also helps to prevent foreign matters from obstructing the contact.

[Cross Section of Contacts]

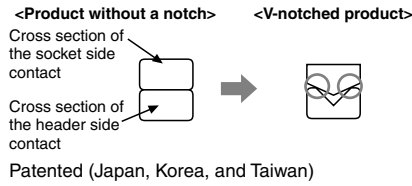


3) Use of Ni barrier construction is standard. Highly effective against solder creeping.

• Ni barrier

The exposed nickel-plated portion of the gold-plated contact prevents solder creep despite the ultra low profile of the contact.


[Contact]

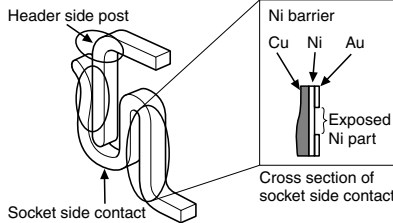

4) Porosity treatment applied for improved resistance against corrosion.


Porosity treatment

This treatment consists in coating the surface with a very thin film to seal pinholes in the gold plating. We have developed this porosity treatment technology, which ensures contact reliability for thin gold plating comparable to that of thick gold plating.

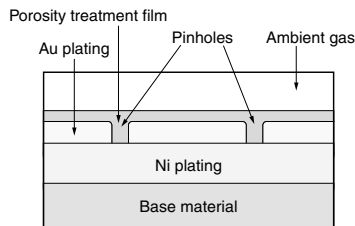

- Improvement in insertion/removal durability
- Improvement in resistance to corrosion
- Improvement in contact reliability for digital signals


3. Even with the low profile, the effective mating length has been extended to ensure that there is some latitude in the mating.

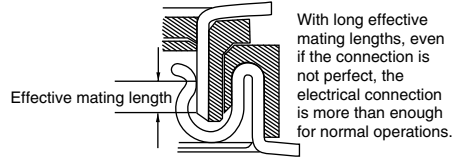

Type	Effective mating length
P5K	0.65 mm
P5KS	1.0 mm

4. Automatic mounting

1) Suction area for suction-type automatic mounting machines is employed.

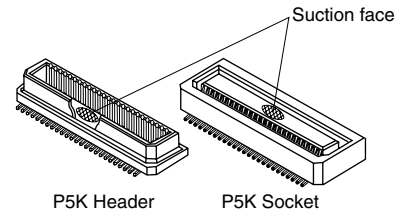

5. Compliance with RoHS' Directive Environmentally friendly, the connectors' comply with Europe's RoHS' Directive. Cadmium, lead, mercury, hexavalent, chromium, PBB and PBDE are not used.

APPLICATIONS

1. Compact portable devices “Cellular phones, DVC, Digital cameras, etc”

2. The 160-contacts connector:

This connector is particularly suited to the motherboard, CPU board, and other multi-pin expansion boards on notebook PCs and other info-communications applications.


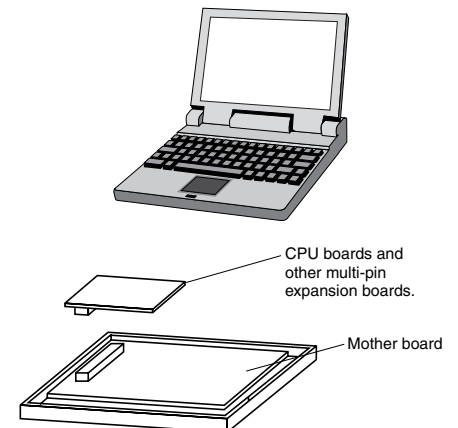


TABLE OF PRODUCT TYPES

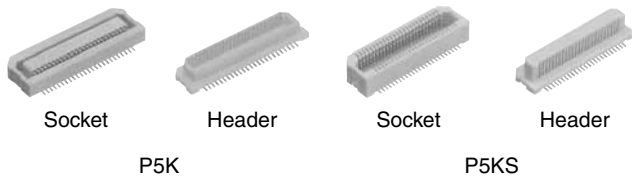

Product name		P5K <i>TOUGH CONTACT</i>		P5KS <i>TOUGH CONTACT</i>								
Mated height		3.0mm	3.5mm	4.0mm	4.5mm	5.0mm	5.5mm	6.0mm	6.5mm	7.0mm	8.0mm	9.0mm
		Number of contacts	20	☆	☆	☆	☆	☆	☆	☆	☆	☆
22	☆		☆									
24				☆	☆							
30	☆		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
34						☆	☆					
36					☆							
40	☆		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
50	☆		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
60	☆		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
70	☆		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
80	☆		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
100	☆		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
120	☆		☆	☆	☆							
130									☆			
160			☆	☆								

Notes: 1. The standard type comes without positioning bosses. (Positioning bosses come standard on types with 4.0 mm and 4.5 mm mated height with 120 and 160 contacts, and 6.5 mm mated height with 130 contacts.) Connectors with positioning boss are available for on-demand production.
 2. Please consult us for products which have no ☆ mark.

ORDERING INFORMATION

1. P5K (3.0 mm and 3.5 mm)

AXK 7 Y G

5: Narrow Pitch Connector P5K Socket
 6: Narrow Pitch Connector P5K Header

Number of contacts (2 digits)

Mated height

<Socket>

1: For mated height 3.0 mm and 3.5 mm

<Header>

2: For mated height 3.5 mm

3: For mated height 3.0 mm

Functions

3: With positioning bosses

4: Without positioning bosses

Surface treatment (Contact portion / Terminal portion)

7: Ni plating on base, Au plating on surface /

Ni plating on base, Au plating on surface (Ni barrier product)

Contact portion

<Socket>

Y: V notch type product

<Header>

Y: V notch type product

Packing

G: 1,500 pieces embossed tape and plastic reel × 2

AXK(5(S)/6(S))

2. P5KS (4.0 mm, 4.5 mm, 5.0 mm, 5.5 mm, 6.0 mm, 6.5 mm, 7.0 mm, 8.0 mm and 9.0 mm)

AXK

5S: Narrow Pitch Connector P5KS Socket
6S: Narrow Pitch Connector P5KS Header

Number of contacts (2 digits)

Mated height

<Socket>

0: For mated height 4.0 mm, 5.0 mm and 6.0 mm

2: For mated height 4.5 mm, 5.5 mm and 6.5 mm

3: For mated height 7.0 mm, 8.0 mm and 9.0 mm

<Header>

4: For mated height 4.0 mm, 4.5 mm and 7.0 mm

5: For mated height 5.0 mm, 5.5 mm and 8.0 mm

6: For mated height 6.0 mm, 6.5 mm and 9.0 mm

Functions

3: With positioning boss and direction for protection from reverse mating

4: Without positioning boss/with direction for protection from reverse mating

7: With positioning boss/without direction for protection from reverse mating

8: Without positioning boss and direction for protection from reverse mating

Surface treatment (Contact portion / Terminal portion)

7: Ni plating on base, Au plating on surface /

Ni plating on base, Au plating on surface (Ni barrier product)

Contact portion

<Socket>

Y: V notch type product

<Header>

Y: V notch type product

Packing

G: 1,500 pieces embossed tape and plastic reel × 2

(Socket: Mated heights 4.0 mm, 4.5 mm, 5.0 mm, 5.5 mm, 6.0 mm, 6.5 mm)
(Header: Mated heights 4.0 mm, 4.5 mm, 7.0 mm)

1,000 pieces plastic reel × 2

(Socket: Mated heights 7.0 mm, 8.0 mm, 9.0 mm)
(Header: Mated heights 5.0 mm, 5.5 mm, 6.0 mm, 6.5 mm, 8.0 mm, 9.0 mm)

Notes: 1. Models with mating directionality to prevent reverse insertion have over 100 contacts. Models without mating directionality to prevent reverse insertion have less than 100 contacts.

2. The plating on the solder terminal portion has changed from SnPb to Au plating from the production lot of December, 2002, in order to eliminate lead.

PRODUCT TYPES

1. P5K

Product name	Mated height	No. of contacts	Part No.		Packing		
			Socket	Header	Inner carton (1 reel)	Outer carton	
			<i>TOUGH CONTACT</i>	<i>TOUGH CONTACT</i>			
P5K	3.0 mm	20	AXK520147YG	AXK620347YG	1,500 pieces	3,000 pieces	
		22	AXK522147YG	AXK622347YG			
		30	AXK530147YG	AXK630347YG			
		40	AXK540147YG	AXK640347YG			
		50	AXK550147YG	AXK650347YG			
		60	AXK560147YG	AXK660347YG			
		70	AXK570147YG	AXK670347YG			
		80	AXK580147YG	AXK680347YG			
		100	AXK500147YG	AXK600347YG			
		120	AXK5A2147YG	AXK6A2347YG			
		3.5 mm	20	AXK520147YG			AXK620247YG
			22	AXK522147YG			AXK622247YG
	30		AXK530147YG	AXK630247YG			
	40		AXK540147YG	AXK640247YG			
	50		AXK550147YG	AXK650247YG			
	60		AXK560147YG	AXK660247YG			
	70		AXK570147YG	AXK670247YG			
	80		AXK580147YG	AXK680247YG			
	100		AXK500147YG	AXK600247YG			
	120		AXK5A2147YG	AXK6A2247YG			

- Notes) 1. Regarding ordering units: During production: Please make orders in 1 reel units.
 Samples for mounting confirmation: Available in units of 50 pieces. Please consult us. (See "Regarding sample orders to confirm proper mounting" on page 13.)
 Samples: Small lot orders are possible.
2. The standard type comes without positioning bosses.
 Connectors with positioning bosses are available on-demand production. For P5K type of 8th digit of the part no. changes from 4 to 3.
 e.g. Mated height 3.0 mm, 20 contacts for sockets: AXK520137YG
3. Previous non-***TOUGH CONTACT*** types and current ***TOUGH CONTACT*** types are compatible for mating.

2. P5KS

Product name	Mated height	No. of contacts	Part No.		Packing	
			Socket	Header	Inner carton (1 reel)	Outer carton
			<i>TOUGH CONTACT</i>	<i>TOUGH CONTACT</i>		
P5KS	4.0 mm	20	AXK5S20047YG	AXK6S20447YG	"G" mark on end of part No.; 1,500 pieces	"G" mark on end of part No.; 3,000 pieces
		24	AXK5S24047YG	AXK6S24447YG		
		30	AXK5S30047YG	AXK6S30447YG		
		40	AXK5S40047YG	AXK6S40447YG		
		50	AXK5S50047YG	AXK6S50447YG		
		60	AXK5S60047YG	AXK6S60447YG		
		70	AXK5S70047YG	AXK6S70447YG		
		80	AXK5S80047YG	AXK6S80447YG		
		100	AXK5S00047YG	AXK6S00447YG		
		120	AXK5SA2077YG	AXK6SA2477YG		
		160	AXK5SA6077YG	AXK6SA6477YG		
		4.5 mm	20	AXK5S20247YG		
	24		AXK5S24247YG	AXK6S24447YG		
	30		AXK5S30247YG	AXK6S30447YG		
	36		AXK5S36247YG	AXK6S36447YG		
	40		AXK5S40247YG	AXK6S40447YG		
	50		AXK5S50247YG	AXK6S50447YG		
	60		AXK5S60247YG	AXK6S60447YG		
	70		AXK5S70247YG	AXK6S70447YG		
	80		AXK5S80247YG	AXK6S80447YG		
	100		AXK5S00247YG	AXK6S00447YG		
	120		AXK5SA2277YG	AXK6SA2477YG		
	160		AXK5SA6277YG	AXK6SA6477YG		

AXK(5(S)/6(S))

Product name	Mated height	No. of contacts	Part No.		Packing	
			Socket	Header	Inner carton (1 reel)	Outer carton
			<i>TOUGH CONTACT</i>	<i>TOUGH CONTACT</i>		
P5KS	5.0 mm	20	AXK5S20047YG	AXK6S20547YG	"G" mark on end of part No.; Socket: 1,500 pieces Header: 1,000 pieces	"G" mark on end of part No.; Socket: 3,000 pieces Header: 2,000 pieces
		30	AXK5S30047YG	AXK6S30547YG		
		34	AXK5S34047YG	AXK6S34547YG		
		40	AXK5S40047YG	AXK6S40547YG		
		50	AXK5S50047YG	AXK6S50547YG		
		60	AXK5S60047YG	AXK6S60547YG		
		70	AXK5S70047YG	AXK6S70547YG		
		80	AXK5S80047YG	AXK6S80547YG		
	5.5 mm	100	AXK5S00047YG	AXK6S00547YG		
		20	AXK5S20247YG	AXK6S20547YG		
		30	AXK5S30247YG	AXK6S30547YG		
		34	AXK5S34247YG	AXK6S34547YG		
		40	AXK5S40247YG	AXK6S40547YG		
		50	AXK5S50247YG	AXK6S50547YG		
		60	AXK5S60247YG	AXK6S60547YG		
		70	AXK5S70247YG	AXK6S70547YG		
	6.0 mm	80	AXK5S80247YG	AXK6S80547YG		
		100	AXK5S00247YG	AXK6S00547YG		
		20	AXK5S20047YG	AXK6S20647YG		
		30	AXK5S30047YG	AXK6S30647YG		
		40	AXK5S40047YG	AXK6S40647YG		
		50	AXK5S50047YG	AXK6S50647YG		
		60	AXK5S60047YG	AXK6S60647YG		
		70	AXK5S70047YG	AXK6S70647YG		
	6.5 mm	80	AXK5S80047YG	AXK6S80647YG		
		100	AXK5S00047YG	AXK6S00647YG		
		20	AXK5S20247YG	AXK6S20647YG		
		30	AXK5S30247YG	AXK6S30647YG		
		40	AXK5S40247YG	AXK6S40647YG		
		50	AXK5S50247YG	AXK6S50647YG		
		60	AXK5S60247YG	AXK6S60647YG		
		70	AXK5S70247YG	AXK6S70647YG		
	7.0 mm	80	AXK5S80247YG	AXK6S80647YG		
		100	AXK5S00247YG	AXK6S00647YG		
		130	AXK5SA3277YG	AXK6SA3677YG		
		20	AXK5S20347YG	AXK6S20447YG		
		30	AXK5S30347YG	AXK6S30447YG		
		40	AXK5S40347YG	AXK6S40447YG		
		50	AXK5S50347YG	AXK6S50447YG		
		60	AXK5S60347YG	AXK6S60447YG		
	8.0 mm	70	AXK5S70347YG	AXK6S70447YG		
		80	AXK5S80347YG	AXK6S80447YG		
		100	AXK5S00347YG	AXK6S00447YG		
		20	AXK5S20347YG	AXK6S20547YG		
		30	AXK5S30347YG	AXK6S30547YG		
		40	AXK5S40347YG	AXK6S40547YG		
		50	AXK5S50347YG	AXK6S50547YG		
		60	AXK5S60347YG	AXK6S60547YG		
	9.0 mm	70	AXK5S70347YG	AXK6S70547YG		
		80	AXK5S80347YG	AXK6S80547YG		
		100	AXK5S00347YG	AXK6S00547YG		
		20	AXK5S20347YG	AXK6S20647YG		
30		AXK5S30347YG	AXK6S30647YG			
40		AXK5S40347YG	AXK6S40647YG			
50		AXK5S50347YG	AXK6S50647YG			
60		AXK5S60347YG	AXK6S60647YG			

- Notes) 1. Regarding ordering units: During production: Please make orders in 1 reel units.
 Samples for mounting confirmation: Available in units of 50 pieces. Please consult us. (See "Regarding sample orders to confirm proper mounting" on page 13.)
 Samples: Small lot orders are possible.
2. The standard type comes without positioning bosses (However, mated heights of 4 mm or higher and 120 pins or more comes standard with bosses). Connectors with positioning bosses are available for on-demand production. For P5KS type of 9th digit of the part no. changes from 4 to 3.
 e.g. Mated height 4.0 mm, 20 contacts for sockets: AXK5S20037YG
3. Previous non-***TOUGH CONTACT*** types and current ***TOUGH CONTACT*** types are compatible for mating.

SPECIFICATIONS

1. Characteristics

Item	Specifications			Conditions
	3mm, 3.5mm type	4mm, 4.5mm, 5mm, 5.5mm, 6mm, 6.5mm type	7mm, 8mm, 9mm type	
Electrical characteristics	Rated current	0.5A/terminal (Max. 10A) / 0.5A/terminal (Max. 16A)		
	Rated voltage	60V AC/DC		
	Breakdown voltage	150V AC for 1 min.		Detection current: 1mA
	Insulation resistance	Min. 1000MΩ		Using 500V DC megger
	Contact resistance	Max. 60mΩ	Max. 80mΩ	Measured based on the HP4338B measurement method of JIS C 5402
Mechanical characteristics	Composite insertion force	Max. 0.785N {80gf} × no. of contacts (initial)		
	Composite removal force	Min. 0.0588N {6gf} × no. of contacts		
	Post holding force	Min. 0.98N {100gf}/contacts		Measures the maximum load in the post axial direction until removal
Environmental characteristics	Ambient temperature	-55°C to +85°C		No freezing at low temperatures
	Soldering heat resistance	Max. peak temperature of 260°C		Infrared reflow soldering
		300°C within 5 sec., 350°C within 3 sec.		Soldering iron
	Thermal shock resistance (header and socket mated)	5 cycles, insulation resistance min. 100MΩ, contact resistance max. 60mΩ	5 cycles, insulation resistance min. 100MΩ, contact resistance max. 80mΩ	Sequence 1. -55 ⁰ / ₃ °C, 30 minutes 2. ~, Max. 5 minutes 3. 85 ⁺³ / ₀ °C, 30 minutes 4. ~, Max. 5 minutes
	Humidity resistance (header and socket mated)	120 hours, insulation resistance min. 100MΩ, contact resistance max. 60mΩ	120 hours, insulation resistance min. 100MΩ, contact resistance max. 80mΩ	Bath temperature 40±2°C, humidity 90 to 95% R.H.
	Saltwater spray resistance (header and socket mated)	24 hours, insulation resistance min. 100MΩ, contact resistance max. 60mΩ	24 hours, insulation resistance min. 100MΩ, contact resistance max. 80mΩ	Bath temperature 35±2°C, saltwater concentration 5±1%
H ₂ S resistance (header and socket mated)	48 hours, contact resistance max. 60mΩ	48 hours, contact resistance max. 80mΩ	Bath temperature 40±2°C, gas concentration 3±1 ppm, humidity 75 to 80% R.H.	
Lifetime characteristics	Insertion and removal life	50 times		Repeated insertion and removal speed of max. 200 times/hours
Unit weight	P5K 3mm 30 contacts P5KS 4mm 30 contacts	Socket: 0.17g Header: 0.09g Socket: 0.18g Header: 0.16g		

2. Material and surface treatment

Part name	Mated height 3mm, 3.5mm, 4mm, 4.5mm, 5mm, 5.5mm, 6mm, 6.5mm, 7mm, 8mm, 9mm	
	Material	Surface treatment
Molded portion	Heat-resistant resin (UL94V-0)	—
Contact/post	Copper alloy	Contact portion: Ni plating on base, Au plating on surface Terminal portion: Ni plating on base, Au plating on surface (Except for thick of terminal) However, the area adjacent to the terminal on Ni barrier models is exposed to Ni on base.

DIMENSIONS

mm General tolerance: ±0.2


P5K: Mated height 3mm, 3.5mm type

• Socket



Dimension table (mm)

No. of contacts	A	B
20	8.20	4.50
22	8.70	5.00
30	10.70	7.00
40	13.20	9.50
50	15.70	12.00
60	18.20	14.50
70	20.70	17.00
80	23.20	19.50
100	28.20	24.50
120	33.20	29.50

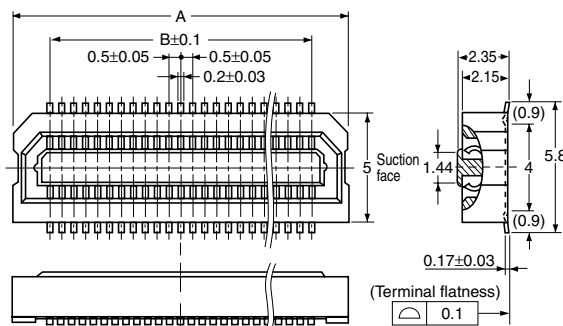

AXK(5(S)/6(S))


• Header

mm General tolerance: ± 0.2




Dimension table (mm)

No. of contacts	A	B
20	8.20	4.50
22	8.70	5.00
30	10.70	7.00
40	13.20	9.50
50	15.70	12.00
60	18.20	14.50
70	20.70	17.00
80	23.20	19.50
100	28.20	24.50
120	33.20	29.50

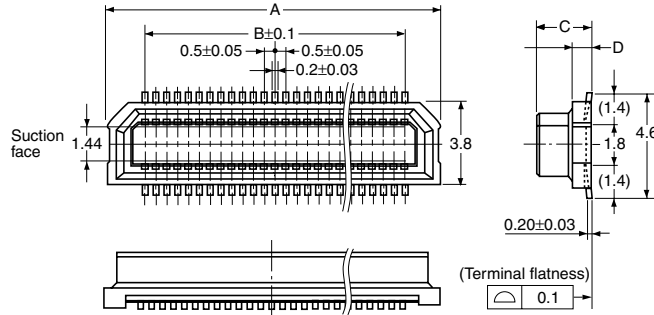

Mated height	C	D
3.0 mm	2.4	0.85
3.5 mm	2.9	1.35

• Socket and header are mated



Mated height	A
3.0 mm	3.0
3.5 mm	3.5

Note) P5KS series (mated heights 4.0mm, 4.5mm, 5.0mm, 5.5mm, 6.0mm, 6.5mm, 7.0mm, 8.0mm, and 9.0mm) cannot be mated to this type.


P5KS: Mated height 4.0mm, 4.5mm, 5.0mm, 5.5mm, 6.0mm, 6.5mm, 7.0mm, 8.0mm, 9.0mm type

• Socket



Dimension table (mm)

No. of contacts	A	B
20	8.20	4.50
24	9.20	5.50
30	10.70	7.00
34	11.70	8.00
36	12.20	8.50
40	13.20	9.50
50	15.70	12.00
60	18.20	14.50
70	20.70	17.00
80	23.20	19.50
100	28.20	24.50

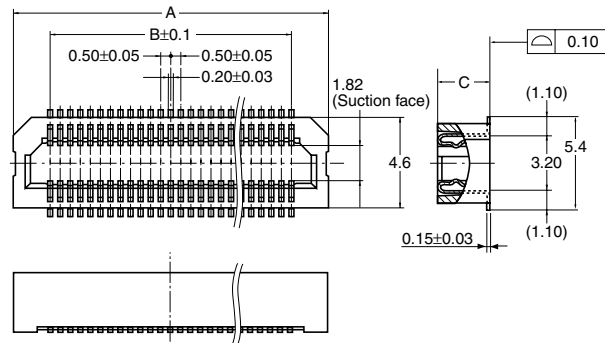


Mated height	C
4.0 mm, 5.0 mm, 6.0 mm	3.05
4.5 mm, 5.5 mm, 6.5 mm	3.55
7.0 mm, 8.0 mm, 9.0 mm	6.05

• Header




Dimension table (mm)

No. of contacts	A	B
20	8.20	4.50
24	9.20	5.50
30	10.70	7.00
34	11.70	8.00
36	12.20	8.50
40	13.20	9.50
50	15.70	12.00
60	18.20	14.50
70	20.70	17.00
80	23.20	19.50
100	28.20	24.50

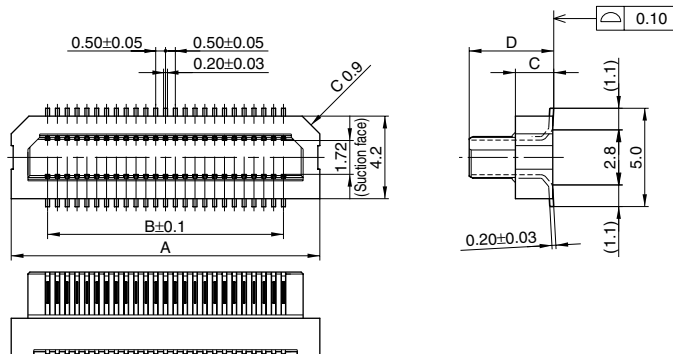

Mated height	C	D
4.0 mm, 4.5 mm, 7.0 mm	0.95	3.3
5.0 mm, 5.5 mm, 8.0 mm	1.95	4.3
6.0 mm, 6.5 mm, 9.0 mm	2.95	5.3

• Socket and header are mated



Mated height	A
4.0 mm	4.0
4.5 mm	4.5
5.0 mm	5.0
5.5 mm	5.5
6.0 mm	6.0
6.5 mm	6.5
7.0 mm	7.0
8.0 mm	8.0
9.0 mm	9.0


Note) P5K series (mated heights 3.0mm, 3.5mm) cannot be mated to this type.

P5KS: Mated height 4.0mm, 4.5mm for 120 contacts and 160 contacts types, 6.5mm for 130 contacts type

• Socket



No. of contacts	A	B	C
120	32.50	29.50	32.00
130	35.00	32.00	34.50
160	42.50	39.50	42.00

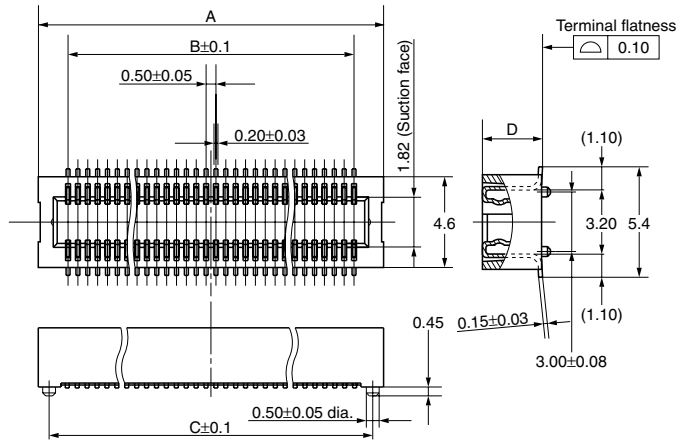


Mated height	D
4.0 mm	3.05
4.5 mm, 6.5 mm	3.55

• Header




No. of contacts	A	B	C
120	32.50	29.50	31.00
130	35.00	32.00	33.50
160	42.50	39.50	41.00

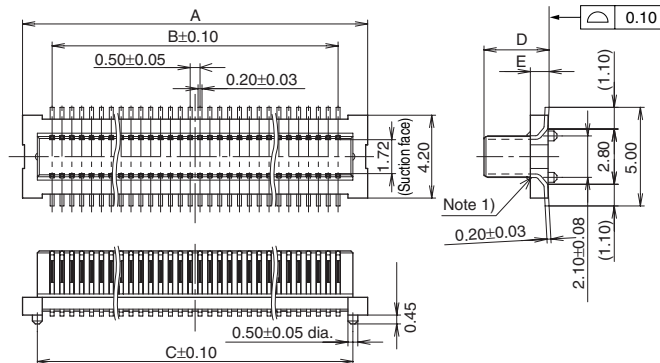

Mated height	D	E
4.0 mm, 4.5 mm	3.30	0.95
6.5 mm	5.30	2.95

• Socket and header are mated



Mated height	H
4.0 mm	4.0
4.5 mm	4.5
6.5 mm	6.5

Notes) 1. Inquiry separately for diagrams of the embossed tape and cautions for use.
2. Be sure to ask for proper specifications and drawings before actual use.


AXK(5(S)/6(S))

EMBOSSED TAPE DIMENSIONS (unit:mm, Common for respective contact type, socket and header)

• Tape dimensions (Conforming to JIS C 0806-1990.

• Plastic reel dimensions (Conforming to EIAJ ET-7200B)

However, some tapes have mounting hole pitches that do not comply with the standard.)

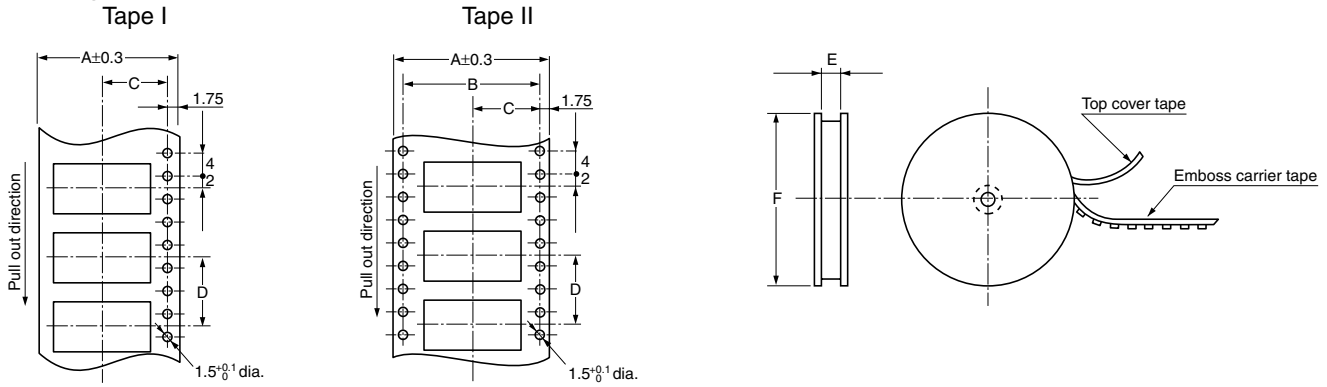

Dimension table (mm)

Suffix: G (1 reel, 1,500 pieces or 1,000 pieces embossed tape and plastic reel package)

Type	Mated height	No. of contacts	Type of taping	A	B	C	D	E	F	Quantity per reel
P5K	Socket and header are common 3.0mm, 3.5mm	20 to 50	Tape I	24.0	—	11.5	12.0	25.4±1	380 dia.	1,500 pcs.
		60 to 70	Tape II	32.0	28.4	14.2	12.0	33.4±1	380 dia.	
		80 to 100	Tape II	44.0	40.4	20.2	12.0	45.4±1	380 dia.	
		120	Tape II	56.0	52.4	26.2	12.0	57.4±1	380 dia.	
P5KS	Socket: 4.0mm, 4.5mm, 5.0mm, 5.5mm, 6.0mm, 6.5mm Header: 4.0mm, 4.5mm, 7.0mm	20 to 50	Tape I	24.0	—	11.5	12.0	25.4±1	380 dia.	1,500 pcs.
		60 to 70	Tape II	32.0	28.4	14.2	12.0	33.4±1	380 dia.	
		80 to 100	Tape II	44.0	40.4	20.2	12.0	45.4±1	380 dia.	
		120 to 160	Tape II	56.0	52.4	26.2	12.0	57.4±1	380 dia.	
	Socket: 7.0mm, 8.0mm, 9.0mm Header: 5.0mm, 5.5mm, 6.0mm, 6.5mm, 8.0mm, 9.0mm	20 to 50	Tape I	24.0	—	11.5	12.0	25.4±1	380 dia.	1,000 pcs.
		60 to 70	Tape II	32.0	28.4	14.2	12.0	33.4±1	380 dia.	
		80 to 100	Tape II	44.0	40.4	20.2	12.0	45.4±1	380 dia.	
		130	Tape II	56.0	52.4	26.2	12.0	57.4±1	380 dia.	


Connector orientation with respect to direction of progress of embossed tape

Type	P5K	P5KS (Less than 100 contacts)	P5KS 120, 130, 160 contacts
Direction of tape progress			
	Socket This corner is oriented on the C side.	Socket This corner is oriented on the C side.	Socket
	Header This corner is oriented on the C side.	Header This corner is oriented on the C side.	Header Note: There is no indication on this product regarding top-bottom or left-right orientation.

NOTES

1. Prevention of reverse mating

Other than P5KS series 120, 130, 160 contacts type, the socket and header are protected from reverse mating by a molded resin key. Excessive mating force may damage the key, so be sure to match chamfered corners when mating.

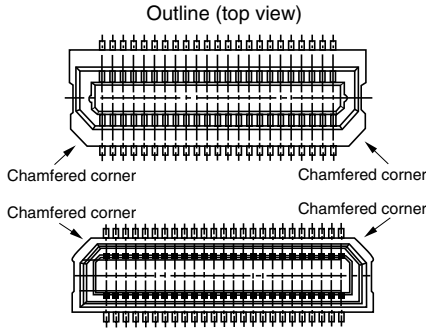


2. PC Boards and Recommended Metal Mask Patterns


Connectors are mounted with high density, with a pitch interval of 0.4 to 0.5 mm. It is therefore necessary to make sure that the right levels of solder are used, in order to reduce solder bridge and other issues. The figures to the right are recommended metal mask patterns. Please use them as a reference.

• P5K Socket


Recommended PC board pattern (TOP VIEW)

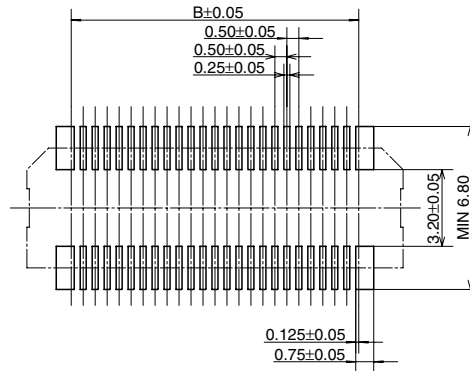

Recommended metal mask pattern
Metal mask thickness: Here, 150 μ m
(Opening area ratio: 56%)

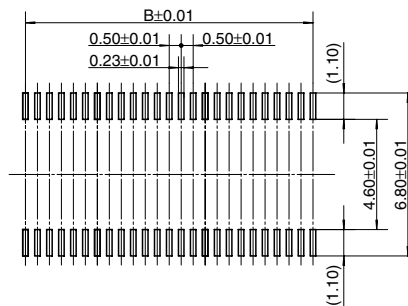


Recommended metal mask pattern
Metal mask thickness: Here, 120 μ m
(Opening area ratio: 69%)

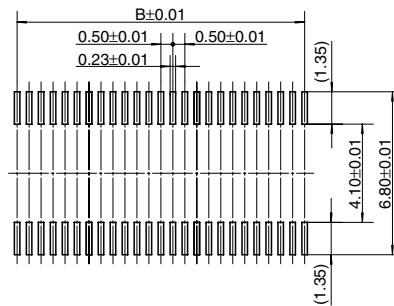


• P5K Header


Recommended PC board pattern (TOP VIEW)

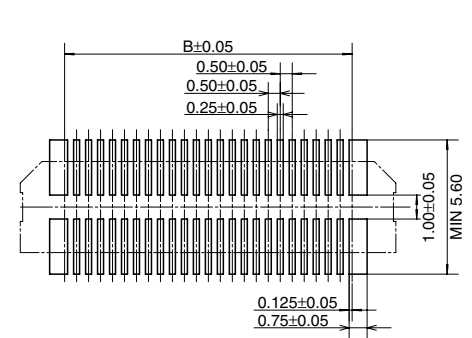

Recommended metal mask pattern
Metal mask thickness: Here, 150 μ m
(Opening area ratio: 62%)

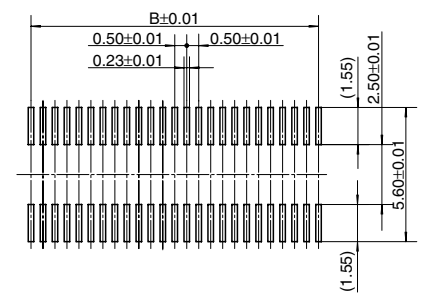

Recommended metal mask pattern
Metal mask thickness: Here, 120 μ m
(Opening area ratio: 78%)

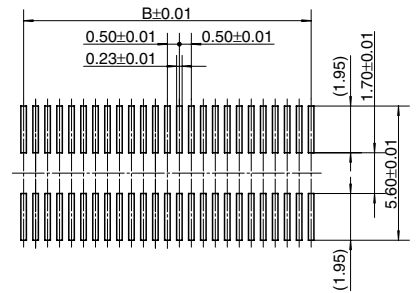


* See the dimension table on page 75 for more information on the B dimension of the socket and header.

AXK(5(S)/6(S))


P5KS: Mated height 4.0mm, 4.5mm, 5.0mm, 5.5mm, 6.0mm, 6.5mm, 7.0mm, 8.0mm, 9.0mm type

• Socket


Recommended PC board pattern (TOP VIEW)

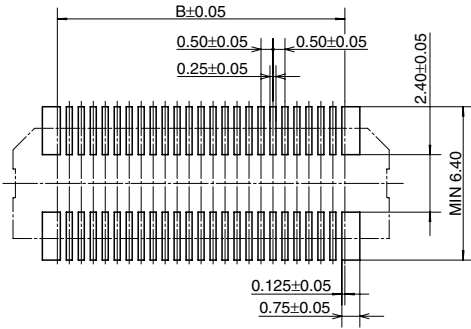

Recommended metal mask pattern
Metal mask thickness: Here, 150 μm
(Opening area ratio: 60%)

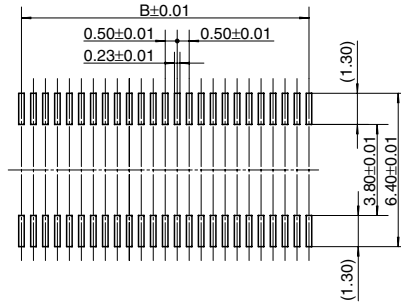


Recommended metal mask pattern
Metal mask thickness: Here, 120 μm
(Opening area ratio: 76%)

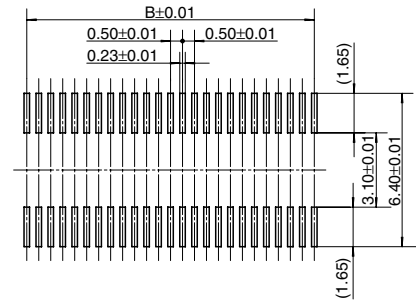


* See the dimension table on page 76 for more information on the B dimension.

• Header


Recommended PC board pattern (TOP VIEW)

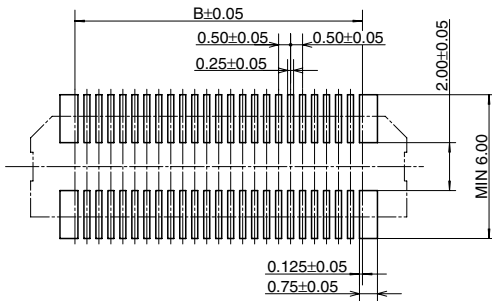

Recommended metal mask pattern
Metal mask thickness: Here, 150 μm
(Opening area ratio: 69%)

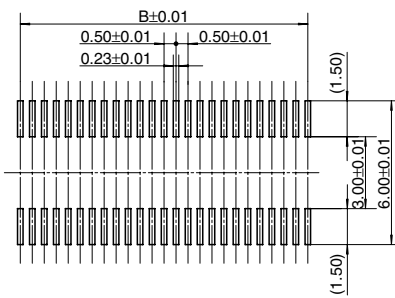

Recommended metal mask pattern
Metal mask thickness: Here, 120 μm
(Opening area ratio: 87%)

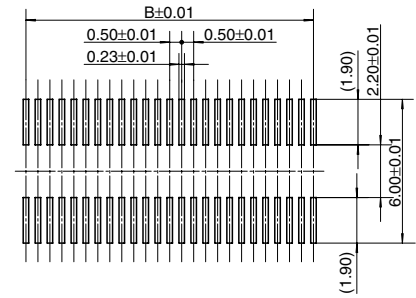


* See the dimension table on page 76 for more information on the B dimension.


P5KS: Mated height 4.0mm, 4.5mm for 120 contacts and 160 contacts types, 6.5mm for 130 contacts type

• Socket


Recommended PC board pattern (TOP VIEW)

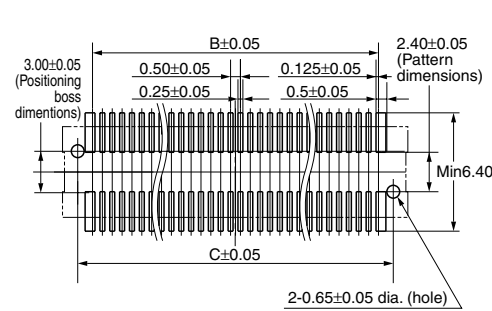

Recommended metal mask pattern
Metal mask thickness: Here, 150 μm
(Opening area ratio: 60%)

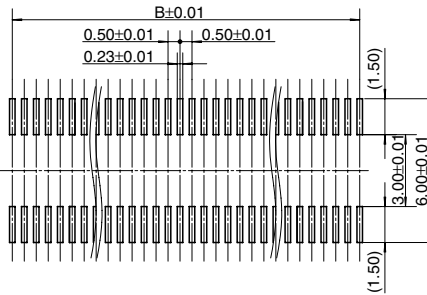


Recommended metal mask pattern
Metal mask thickness: Here, 120 μm
(Opening area ratio: 76%)

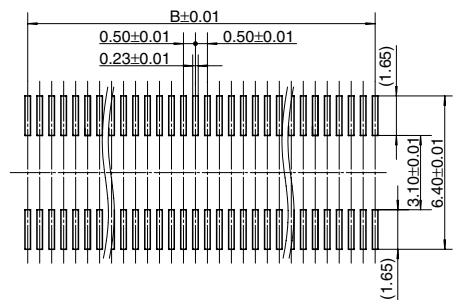


* See the dimension table on page 77 for more information on the B and C dimensions.

• Header


Recommended PC board pattern (TOP VIEW)

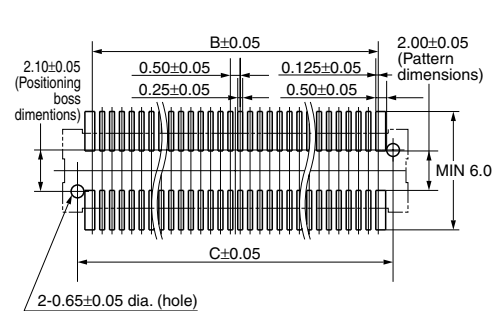

Recommended metal mask pattern
Metal mask thickness: Here, 150 μm
(Opening area ratio: 69%)

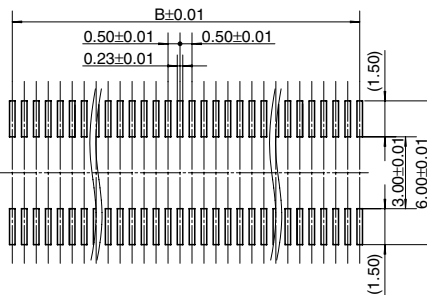

Recommended metal mask pattern
Metal mask thickness: Here, 120 μm
(Opening area ratio: 87%)

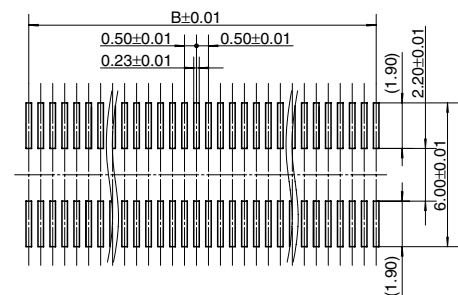

* See the dimension table on page 77 for more information on the B and C dimensions.

Regarding general notes, please refer to page 12.

For other details, please verify with the product specification sheets.