




**SPECIFICATIONS**

- Accommodates .062" ± .008" [1.57 ± .20] PC board
- PPS or PA9T insulator
- Molded-in key available
- High reliability/high cycle hairpin bellows contact
- 1 amp current rating per contact
- 150 grams normal force minimum


Sullins Edgcards

**TERMINATION TYPE**



**DIMENSIONS**

Dimensions in [ ] are in millimeters, all others are in inches.

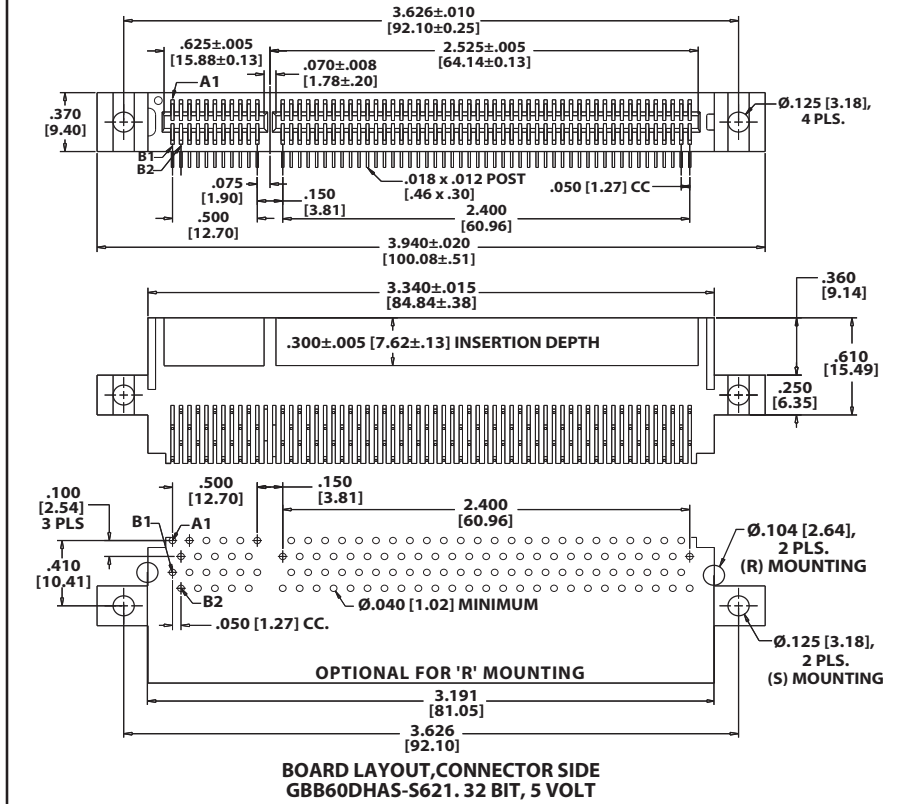

**DIMENSIONS**

Dimensions in [ ] are in millimeters, all others are in inches.

