

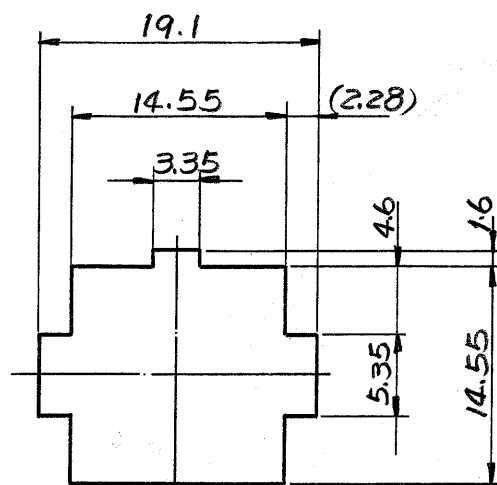
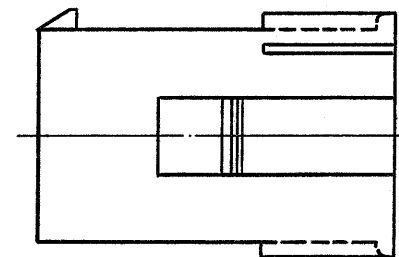
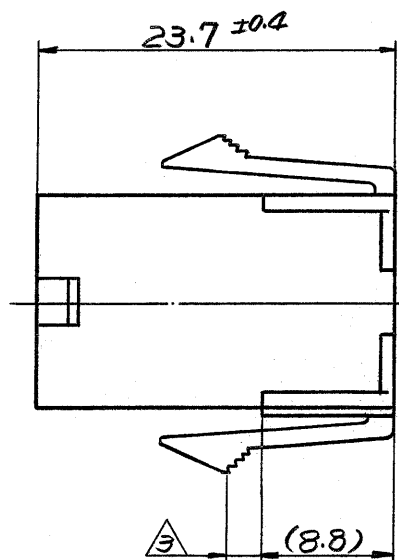


© 1980年 日本エー・エム・ピー株式会社  
AMP社の諸製品は特許又は特許出願中

© 1980 BY AMP (Japan) Ltd.  
ALL RIGHTS RESERVED. AMP  
PRODUCTS COVERED BY PATENTS  
AND/OR PATENTS PENDING

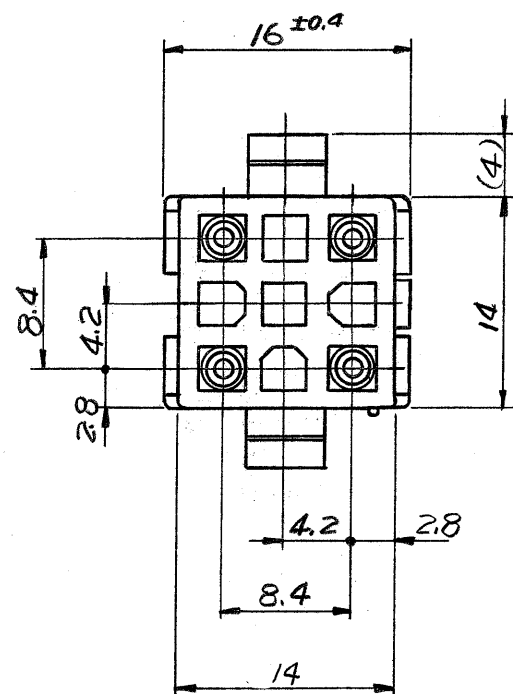

寸法公差は 0.20  
(TOLERANCE : ± 0.2)  
パネル取付穴 (DIMENSION OF PANEL)

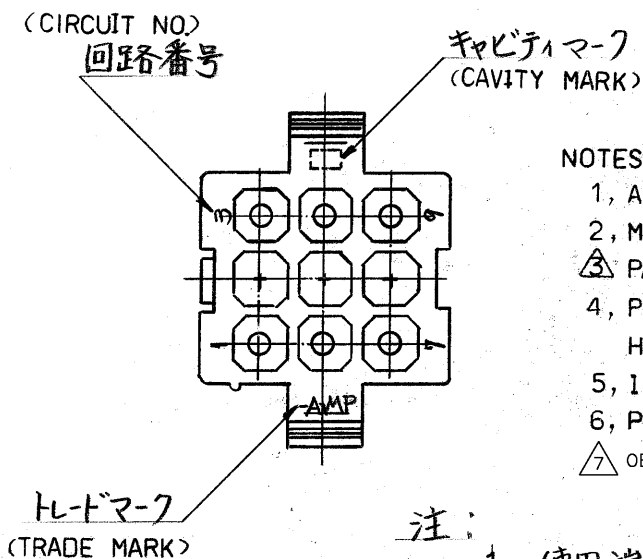

NOTES:

- 1, APPLIED CONTACT P/N : 170359, 170360, 170361, 17062
- 2, MATING CONN : PLUG HOUSING P/N 172340
- 3 PANEL THICKNESS : 0.8 ~ 2.0 mm
- 4, PRESS DIRECTION OF PANEL MUST BE SAME AS HOUSING INSERTED DIRECTION.
- 5, INSTRUCTION SHEET : IS-105J
- 6, PRODUCT SPEC : 108-5151
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI


注:

1. 使用端子型番は 170359, 170360, 170361, 170362
2. 嵌合相手ハウジング型番は 172340
3. 適用パネル厚 0.8 ~ 2.0 mm.
4. 取付穴打抜方向とハウジングの挿入方向は同じとする
5. 取扱説明書 : IS-105J
6. 適用製品仕様書 : 108-5151

△ OBSOLETE

黄 (YELLOW)	1- 172332 -4
黒 (BLACK)	1- ↑ -9
青 (BLUE)	1- ↓ -6
緑 (GREEN)	1- ↓ -5
赤 (RED)	1- ↓ -2
自然色 (NATURAL)	172332 -1
色 (COLOR)	型番 (P/N)

A2	ECO-10-000444	KK	AEG	JAN 10
A1	黄色追加 J-10297	T.O	MS	12/88
A	変更 J-9972	K.A	MS	11/87
O	変更 J81-5998	Z.Y	Z.T	4/81
O	作成 J80-5788	Z.Y	Z.T	12/80
LTR.	変更 (REVISION RECORD)	DR.	CHK.	DATE

材料 (MATERIAL) 6/6 ナイロン (UL94V-2) (NYLON 6/6 UL94V-2)	一般公差 TOLERANCE ± 0.3 EXCEPT ± 1.0 AS NOTED	 日本エー・エム・ピー株式会社 TOKYO, JAPAN 名称 (NAME) MINI-UNIVERSAL MATE-N-LOK CONN. CAP HOUSING 9Pos. (UL94V-2) 9極 ミニユニバーサルメイトンロックコネクタ キャビティハウジング (UL94V-2)
仕上 (FINISH) 色: 表参照 HOUSING: SEE TABLE COLOR	DR. K. YANADA 4/20/81 CHK. Z. Tomiyama DE. Z. Tomiyama 4/21/81 APP.	
SIZE B LOC J 番号 (No.) C-172332		尺度 (SCALE) 2:1 REV. A2 SHEET 1