
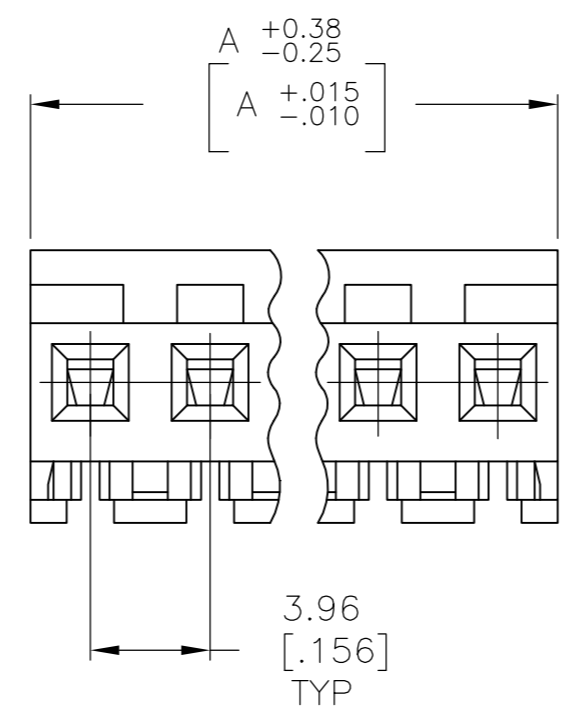
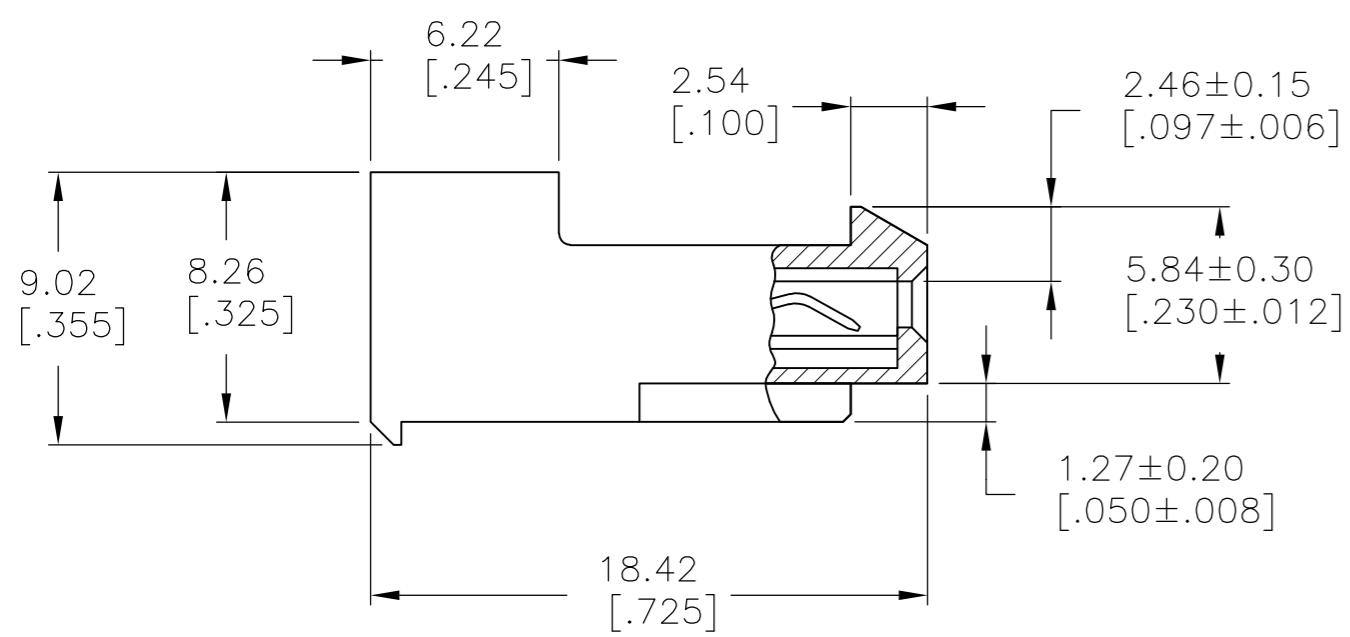


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		P		ECO-07-012872	15JUN07	KW	DB
		P1		REVISED PER ECO-10-000443	15JAN10	KK	AEG

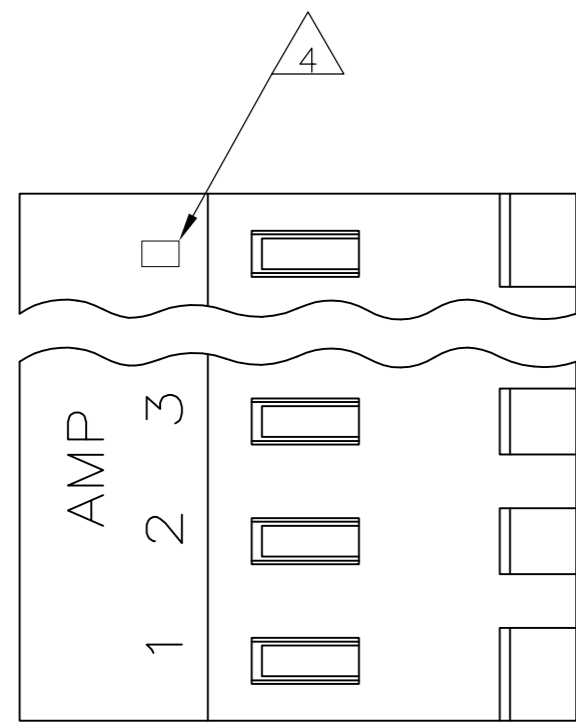

95.10	[3.744]	24	5-641218-4
91.14	[3.588]	23	5-641218-3
87.17	[3.432]	22	5-641218-2
83.21	[3.276]	21	5-641218-1
79.25	[3.120]	20	5-641218-0
75.29	[2.964]	19	4-641218-9
71.32	[2.808]	18	4-641218-8
67.36	[2.652]	17	4-641218-7
63.40	[2.496]	16	4-641218-6
59.44	[2.340]	15	4-641218-5
55.47	[2.184]	14	4-641218-4
51.51	[2.028]	13	4-641218-3
47.55	[1.872]	12	4-641218-2
43.59	[1.716]	11	4-641218-1
39.62	[1.560]	10	4-641218-0
35.66	[1.404]	9	3-641218-9
31.70	[1.248]	8	3-641218-8
27.74	[1.092]	7	3-641218-7
23.77	[.936]	6	3-641218-6
19.81	[.780]	5	3-641218-5
15.85	[.624]	4	3-641218-4
11.89	[.468]	3	3-641218-3
7.92	[.312]	2	3-641218-2

7	SUPERCEDED BY 5-641218-4	95.10	[3.744]	24	2-641218-4
7	SUPERCEDED BY 5-641218-3	91.14	[3.588]	23	2-641218-3
7	SUPERCEDED BY 5-641218-2	87.17	[3.432]	22	2-641218-2
7	SUPERCEDED BY 5-641218-1	83.21	[3.276]	21	2-641218-1
7	SUPERCEDED BY 5-641218-0	79.25	[3.120]	20	2-641218-0
7	SUPERCEDED BY 4-641218-9	75.29	[2.964]	19	1-641218-9
7	SUPERCEDED BY 4-641218-8	71.32	[2.808]	18	1-641218-8
7	SUPERCEDED BY 4-641218-7	67.36	[2.652]	17	1-641218-7
7	SUPERCEDED BY 4-641218-6	63.40	[2.496]	16	1-641218-6
7	SUPERCEDED BY 4-641218-5	59.44	[2.340]	15	1-641218-5
7	SUPERCEDED BY 4-641218-4	55.47	[2.184]	14	1-641218-4
7	SUPERCEDED BY 4-641218-3	51.51	[2.028]	13	1-641218-3
7		47.55	[1.872]	12	1-641218-2
7	SUPERCEDED BY 4-641218-1	43.59	[1.716]	11	1-641218-1
7		39.62	[1.560]	10	1-641218-0
7	SUPERCEDED BY 3-641218-9	35.66	[1.404]	9	641218-9
7		31.70	[1.248]	8	641218-8
7	SUPERCEDED BY 3-641218-7	27.74	[1.092]	7	641218-7
7		23.77	[.936]	6	641218-6
7	SUPERCEDED BY 3-641218-5	19.81	[.780]	5	641218-5
7		15.85	[.624]	4	641218-4
7		11.89	[.468]	3	641218-3
7		7.92	[.312]	2	641218-2

1 MATERIAL: CONNECTOR - NYLON UL94V-2 (YELLOW).
 CONTACTS - 0.00076 [.000030] GOLD IN CONTACT AREA WITH BRIGHT TIN-LEAD FOR 641218-2 THRU 2-641218-4, MATTE WHISKER MITIGATED TIN FOR 3-641218-2 THRU 5-641218-4 OVER NICKEL UNDERPLATE.

2. CONTACTS ACCEPT 20 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.


3. CONTACTS MUST ACCEPT 1.14±0.03 [.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.

4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP.

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LEWIS 12 FEB 91	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		CHK R. SWING 12 FEB 91	NAME MTA-156 CONNECTOR ASSEMBLY, 20 AWG, STANDARD	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD D. CLARK 20 FEB 91	RESTRICTED TO -	
MATERIAL 1		PRODUCT SPEC 108-1051	SIZE A2	CAGE CODE 00779
FINISH 1		APPLICATION SPEC 114-1020	DRAWING NO C=641218	SCALE 4:1
CUSTOMER DRAWING		WEIGHT -	SHEET 1 OF 1 REV P1	