



# Surface Mount Power Voltage-Regulating Diodes



DO-214AA (SMBJ)

PRIMARY CHARACTERISTICS	
$V_Z$	5.6 V to 68 V
$P_D$	3.0 W at $T_L = 75\text{ }^\circ\text{C}$
$P_D$	550 mW at $T_A = 25\text{ }^\circ\text{C}$
$T_J \text{ max.}$	150 $^\circ\text{C}$

### FEATURES

- Low profile package
- Ideal for automated placement
- Low Zener impedance
- Low regulation factor
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260  $^\circ\text{C}$
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



RoHS COMPLIANT

### TYPICAL APPLICATIONS

For general purpose regulation and protection applications.

### MECHANICAL DATA

**Case:** DO-214AA (SMBJ)

Molding compound meets UL 94 V-0 flammability rating

Base P/N-E3 - RoHS compliant, commercial grade

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix meets JESD 201 class 1A whisker test

**Polarity:** Color band denotes cathode end

MAXIMUM RATINGS ( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Maximum steady state power dissipation at $T_L = 75\text{ }^\circ\text{C}$ (Fig. 1)	$P_D$	3.0	W
Maximum steady state power dissipation at $T_A = 25\text{ }^\circ\text{C}$ (Fig. 1) <sup>(1)</sup>	$P_D$	550	mW
Maximum instantaneous forward voltage at 200 mA for all types <sup>(2)</sup>	$V_F$	1.5	V
Operating junction and storage temperature range	$T_J, T_{STG}$	- 55 to + 150	$^\circ\text{C}$

**Notes:**

(1) Mounted on minimum recommended pad layout


(2) Pulse test: 300  $\mu\text{s}$  pulse width, 1 % duty cycle

# SMBZ5919B thru SMBZ5945B



Vishay General Semiconductor

ELECTRICAL CHARACTERISTICS	
SYMBOL	PARAMETER
$V_Z$	Reverse Zener voltage at $I_{ZT}$
$I_{ZT}$	Reverse current
$Z_{ZT}$	Maximum Zener impedance at $I_{ZT}$
$I_{ZK}$	Reverse current
$Z_{ZK}$	Maximum Zener impedance at $I_{ZK}$
$I_R$	Reverse leakage current at $V_R$
$V_R$	Reverse voltage
$I_F$	Forward current
$V_F$	Forward voltage at $I_F$
$I_{ZM}$	Maximum DC Zener current

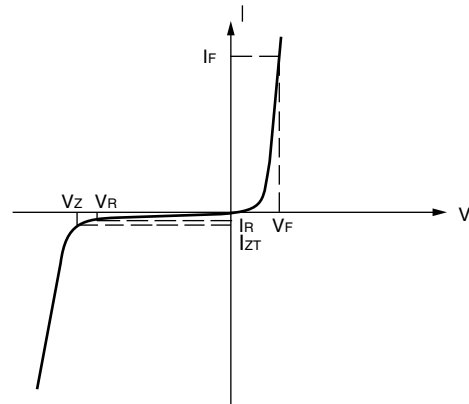

Zener Voltage Regulator

ELECTRICAL CHARACTERISTICS ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)											
PART NUMBER	DEVICE MARKING CODE	ZENER VOLTAGE $V_Z$ AT $I_{ZT}$ (V)			TEST CURRENT $I_{ZT}$ (mA)	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE LEAKAGE CURRENT $I_R$ AT $V_R$		MAXIMUM ZENER CURRENT $I_{ZM}$ (mA)
		MIN.	NOM.	MAX.		$Z_{ZT}$ AT $I_{ZT}$		$Z_{ZK}$ AT $I_{ZK}$	$I_R$ AT $V_R$	$V_F$	
						( $\Omega$ )	( $\Omega$ )				
SMBZ5919B	19B	5.32	5.6	5.88	66.9	5	700	1	200	3	267
SMBZ5920B	20B	5.89	6.2	6.51	60.5	2	700	1	200	4	241
SMBZ5921B	21B	6.46	6.8	7.14	55.1	2.5	400	1	200	5.2	220
SMBZ5924B	24B	8.64	9.1	9.56	41.2	4.0	1000	0.5	25	7.0	164
SMBZ5925B	25B	9.5	10	10.5	37.5	4.5	1000	0.25	25	8.0	150
SMBZ5926B	26B	10.5	11	11.6	34.1	5.5	550	0.25	5	8.4	136
SMBZ5927B	27B	11.4	12	12.6	31.2	6.5	550	0.25	1	9.1	125
SMBZ5928B	28B	12.4	13	13.7	28.8	7.0	550	0.25	1	9.9	115
SMBZ5929B	29B	14.3	15	15.8	25.0	9.0	600	0.25	1	11.4	100
SMBZ5930B	30B	15.2	16	16.8	23.4	10.0	600	0.25	1	12.2	93
SMBZ5931B	31B	17.1	18	18.9	20.8	12.0	650	0.25	1	13.7	83
SMBZ5932B	32B	19.0	20	21.0	18.7	14.0	650	0.25	1	15.2	75
SMBZ5933B	33B	20.9	22	23.1	17.0	17.5	650	0.25	1	16.7	68
SMBZ5934B	34B	22.8	24	25.2	15.6	19.0	700	0.25	1	18.2	62
SMBZ5935B	35B	25.7	27	28.4	13.9	23.0	700	0.25	1	20.6	55
SMBZ5936B	36B	28.5	30	31.5	12.5	28.0	750	0.25	1	22.8	50
SMBZ5937B	37B	31.4	33	34.7	11.4	33.0	800	0.25	1	25.1	45
SMBZ5938B	38B	34.2	36	37.8	10.4	38.0	850	0.25	1	27.4	41
SMBZ5939B	39B	37.1	39	41.0	9.6	45.0	900	0.25	1	29.7	38
SMBZ5940B	40B	40.9	43	45.2	8.7	53.0	950	0.25	1	32.7	34
SMBZ5941B	41B	44.6	47	49.4	8.0	67	1000	0.25	1	35.8	31
SMBZ5942B	42B	48.4	51	53.6	7.3	70	1100	0.25	1	38.8	29
SMBZ5943B	43B	53.2	56	58.8	6.7	86	1300	0.25	1	42.6	26
SMBZ5944B	44B	58.9	62	65.1	6.0	100	1500	0.25	1	47.1	24
SMBZ5945B	45B	64.6	68	71.4	5.5	120	1700	0.25	1	51.7	22



THERMAL CHARACTERISTICS ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	LIMIT	UNIT
Typical thermal resistance, junction to lead	$R_{\theta JL}$	25	$^\circ\text{C/W}$
Typical thermal resistance, junction to ambient <sup>(1)</sup>	$R_{\theta JA}$	226	$^\circ\text{C/W}$

Note:

(1) Mounted on minimum recommended pad layout

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
SMBZ5935B-E3/52	0.096	52	750	7" diameter plastic tape and reel
SMBZ5935B-E3/5B	0.096	5B	3200	13" diameter plastic tape and reel

RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

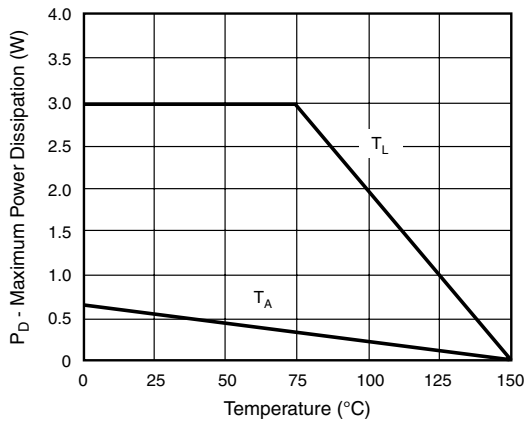


Figure 1. Steady State Power During

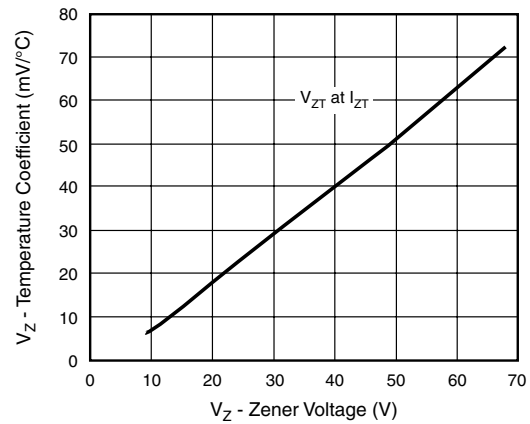


Figure 3. Typical Temperature Coefficients

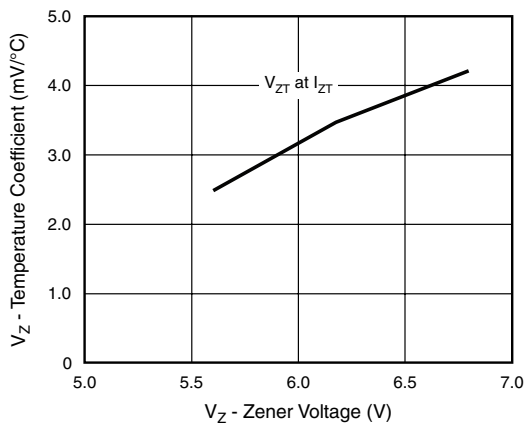


Figure 2. Typical Temperature Coefficients

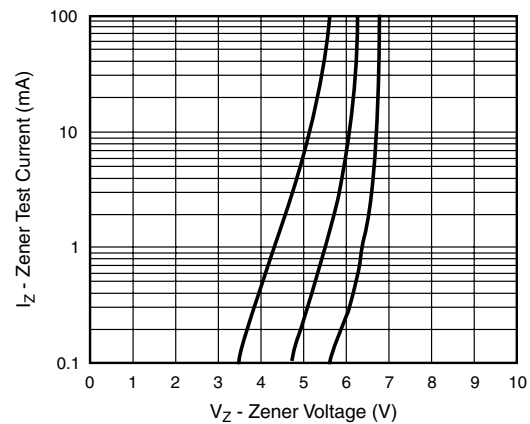


Figure 4. Typical Zener Voltage

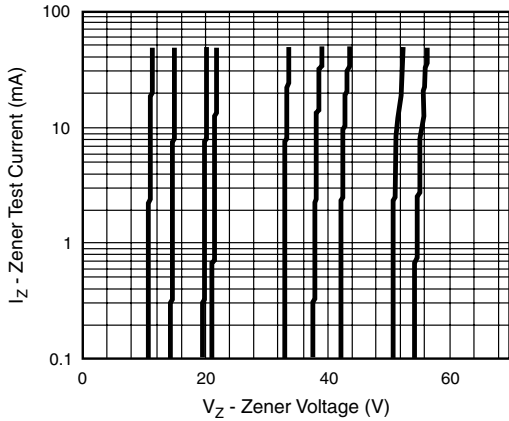


Figure 5. Typical Zener Voltage

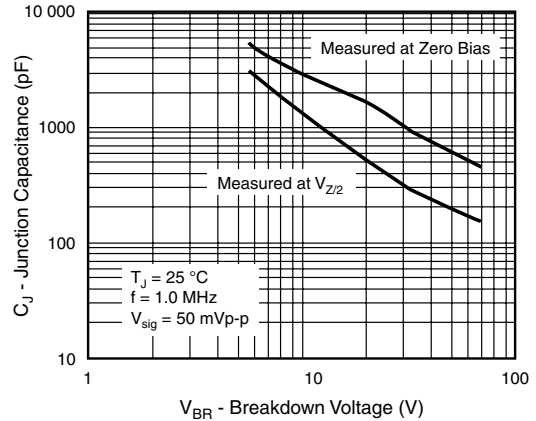


Figure 7. Typical Junction Capacitance


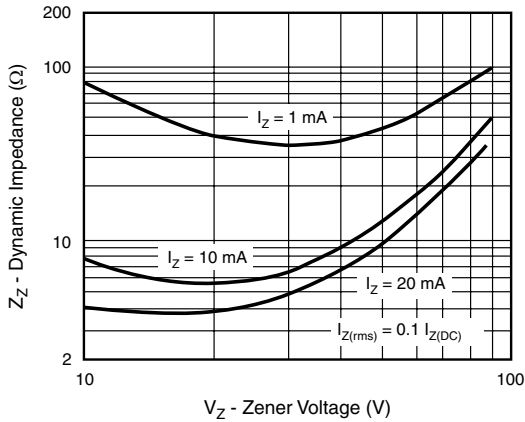


Figure 6. Typical Zener Impedance

**PACKAGE OUTLINE DIMENSIONS** in inches (millimeters)



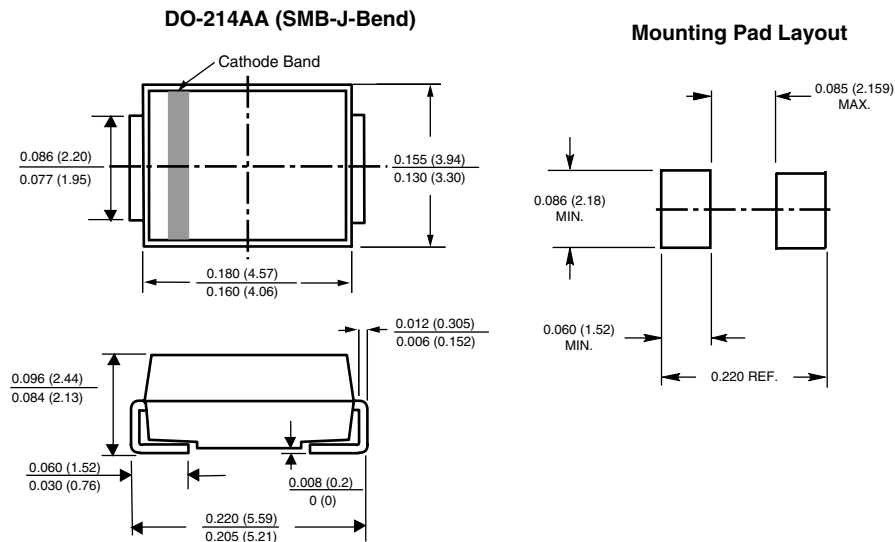

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.