


## Solid Tantalum Chip Capacitors, TANTAMOUNT<sup>®</sup>, High-Rel COTS, Conformal Coated Case



### FEATURES

- High reliability; Weibull grading available
- Surge current testing per MIL-PRF-55365 options available
- Standard and low ESR options
- Terminations: SnPb, standard. 100 % tin available
- Compliant to RoHS directive 2002/95/EC



### PERFORMANCE/ELECTRICAL CHARACTERISTICS

**Operating Temperature:** - 55 °C to + 85 °C  
(To + 125 °C with voltage derating)

**Capacitance Range:** 0.15 µF to 680 µF

**Capacitance Tolerance:** ± 20 %, ± 10 % standard


**Voltage Rating:** 4 WV<sub>DC</sub> to 50 WV<sub>DC</sub>

<b>ORDERING INFORMATION</b>								
T95	D	107	K	010	E	A	S	
TYPE	CASE CODE	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING AT + 85 °C	TERMINATION AND PACKAGING	RELIABILITY LEVEL	ESR	
	See Ratings and Case Codes table.	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.	<b>K = ± 10 %</b> <b>M = ± 20 %</b>	This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V).	<b>E: Sn/Pb solder/7" (178 mm) reels</b> L: Sn/Pb solder/7" (178 mm) ½ reel C: 100 % tin/7" (178 mm) reels H: 100 % tin/7" (178 mm) ½ reel Y = R-case only; Sn/Pb solder, side mounted, 7" reels	<b>A = 1.0 % Weibull</b> B = 0.1 % Weibull <sup>(1)</sup> S = Hi-rel standard burn-in Z = Non-established reliability	<b>A = 10 cycles at + 25 °C</b> B = 10 cycles at - 55 °C/+ 85 °C S = 3 cycles at + 25 °C	<b>S = Std</b> <b>L = Low</b>

**Note**

<sup>(1)</sup> Weibull 0.1 % may not be available on all ratings. See detailed notes in ratings table or contact marketing for availability

### DIMENSIONS in inches [millimeters]

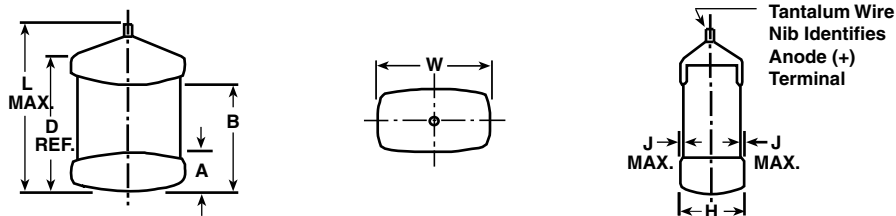

CASE CODE	L (MAX.)	W	H	A	B	D (REF.)	J (MAX.)
A	0.146 [3.7]	0.072 ± 0.012 [1.8 ± 0.3]	0.056 ± 0.012 [1.4 ± 0.3]	0.031 ± 0.012 [0.80 ± 0.30]	0.085 ± 0.016 [2.2 ± 0.4]	0.115 [2.9]	0.004 [0.1]
B	0.158 [4.0]	0.110 + 0.012 - 0.016 [2.8 + 0.3 - 0.4]	0.075 + 0.012 - 0.024 [1.9 + 0.3 - 0.6]	0.031 ± 0.012 [0.80 ± 0.30]	0.097 ± 0.016 [2.5 ± 0.4]	0.138 [3.5]	0.004 [0.1]
C	0.281 [7.1]	0.126 ± 0.012 [3.2 ± 0.3]	0.098 ± 0.012 [2.5 ± 0.3]	0.051 ± 0.012 [1.3 ± 0.30]	0.180 ± 0.024 [4.6 ± 0.6]	0.236 [6.0]	0.004 [0.1]
D	0.293 [7.5]	0.170 ± 0.012 [4.3 ± 0.3]	0.110 ± 0.012 [2.8 ± 0.3]	0.051 ± 0.012 [1.3 ± 0.30]	0.180 ± 0.024 [4.6 ± 0.6]	0.253 [6.4]	0.004 [0.1]
R	0.283 [7.2]	0.235 + 0.012/- 0.024 [6.0 + 0.3/- 0.6]	0.136 ± 0.012 [3.5 ± 0.3]	0.051 ± 0.012 [1.3 ± 0.30]	0.180 ± 0.024 [4.6 ± 0.6]	0.243 [6.2]	0.004 [0.1]
S	0.143 [3.63]	0.072 ± 0.008 [1.83 ± 0.2]	0.048 ± 0.008 [1.22 ± 0.2]	0.023 ± 0.010 [0.58 ± 0.25]	0.085 ± 0.015 [2.16 ± 0.37]	0.115 [2.9]	0.004 [0.1]

\* Pb containing terminations are not RoHS compliant, exemptions may apply



Solid Tantalum Chip Capacitors,  
TANTAMOUNT<sup>®</sup>, High-Rel COTS, Conformal Coated Case

Vishay Sprague

DIMENSIONS in inches [millimeters]							
CASE CODE	L (MAX.)	W	H	A	B	D (REF.)	J (MAX.)
V	0.143 [3.63]	0.104 ± 0.010 [2.65 ± 0.25]	0.051 ± 0.010 [1.3 ± 0.25]	0.023 ± 0.010 [0.58 ± 0.25]	0.085 ± 0.015 [2.16 ± 0.37]	0.115 [2.9]	0.004 [0.1]
X	0.285 [7.24]	0.104 ± 0.010 [2.65 ± 0.25]	0.051 ± 0.010 [1.3 ± 0.25]	0.040 ± 0.020 [1.0 ± 0.5]	0.200 ± 0.027 [5.08 ± 0.69]	0.243 [6.2]	0.004 [0.1]
Y	0.285 [7.24]	0.104 ± 0.010 [2.65 ± 0.25]	0.069 ± 0.010 [1.75 ± 0.25]	0.040 ± 0.020 [1.0 ± 0.5]	0.200 ± 0.027 [5.08 ± 0.69]	0.243 [6.2]	0.004 [0.1]
Z	0.285 [7.24]	0.104 ± 0.010 [2.65 ± 0.25]	0.104 ± 0.010 [2.65 ± 0.25]	0.040 ± 0.020 [1.0 ± 0.5]	0.200 ± 0.027 [5.08 ± 0.69]	0.243 [6.2]	0.004 [0.1]

Note

- The anode termination (D less B) will be a minimum of 0.010" (0.25 mm)

RATINGS AND CASE CODES								
µF	4 V	6.3 V	10 V	16 V	20 V	25 V	35 V	50 V
0.15							S	
0.22							S	
0.33							S	
0.47							S	
0.68						S	S	
1.0						S	S	
1.5					S	S	V	
2.2				S	S	V	X	
3.3			S	S	V			
4.7		S	S	V	X	X	Y	C
6.8	S	S	V	A/X	X	Y	Z	C/D
10	S	V	X	X	Y	C/Y	Z	R
15	V	X	B/X	B/Y	Z	Z	D/R	R
22	X	X	Y	B/Z	Z		R	R
33	X		Z	Z		D/R	R	
47	Y	Y	Z		R	D/R	R	
68	Y			R		D/R		
100	Z	Z	R	C/D	R	R		
120			D/R		R			
150			D/R	D	R			
180		R		R				
220		D/R	D/R	R				
270	D							
330	R	C	D/R	R				
390		R						
470		D	R					
680		R	R					



<b>STANDARD RATINGS</b>						
CAPACITANCE ( $\mu$ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C ( $\mu$ A)	MAX. DF AT + 25 °C 120 Hz (%)	STD. (S) MAX. ESR AT + 25 °C 100 kHz ( $\Omega$ )	LOW (L) MAX. ESR AT + 25 °C 100 kHz ( $\Omega$ )
<b>4 WV<sub>DC</sub> AT + 85 °C, 2.7 WV<sub>DC</sub> AT + 125 °C</b>						
6.8	S	T95S685(1)004(2)(3)(4)L	0.5	6	N/A	2.000
10	S	T95S106(1)004(2)(3)(4)L	0.5	6	N/A	2.000
15	V	T95V156(1)004(2)(3)(4)L	0.6	6	N/A	1.500
22	X	T95X226(1)004(2)(3)(4)L	0.9	6	N/A	1.000
33	X	T95X336(1)004(2)(3)(4)L	1.3	6	N/A	1.000
47	Y	T95Y476(1)004(2)(3)(4)L	1.9	6	N/A	0.600
68	Y	T95Y686(1)004(2)(3)(4)L	2.7	6	N/A	0.600
100	Z	T95Z107(1)004(2)(3)(4)L	4.0	6	N/A	0.400
270	D	T95D277(1)004(2)(3)(4)(5)	10.8	8	0.13	0.060
330	R	T95R337(1)004(2)(3)(4)(5)	13.2	8	0.13	0.080
<b>6.3 WV<sub>DC</sub> AT + 85 °C, 4 WV<sub>DC</sub> AT 125 °C</b>						
4.7	S	T95S475(1)6R3(2)(3)(4)L	0.5	6	N/A	2.000
6.8	S	T95S685(1)6R3(2)(3)(4)L	0.5	6	N/A	2.000
10	V	T95V106(1)6R3(2)(3)(4)L	0.6	6	N/A	1.500
15	X	T95X156(1)6R3(2)(3)(4)L	0.9	6	N/A	1.000
22	X	T95X226(1)6R3(2)(3)(4)L	1.4	6	N/A	1.000
47	Y	T95Y476(1)6R3(2)(3)(4)L	2.8	6	N/A	0.600
100	Z	T95Z107(1)6R3(2)(3)(4)L	6.0	6	N/A	0.400
180	R	T95R187(1)6R3(2)(3)(4)(5)	10.8	8	0.13	0.080
220	D	T95R227(1)6R3(2)(6)(4)(5)	22.0	8	0.14	0.065
220	R	T95R227(1)6R3(2)(3)(4)(5)	13.2	8	0.13	0.080
330	C	T95C337(1)6R3(2)(6)(4)(5)	20.8	8	0.08	0.170
390	R	T95R397(1)6R3(2)(3)(4)(5)	23.4	8	0.13	0.045
470	D	T95D477(1)6R3(2)(3)(4)(5)	28.2	10	0.13	0.060
680	R	T95R687(1)6R3(2)(3)(4)(5)	40.8	12	0.09	0.045
<b>10 WV<sub>DC</sub> AT + 85 °C, 7 WV<sub>DC</sub> AT 125 °C</b>						
3.3	S	T95S335(1)010(2)(3)(4)L	0.5	6	N/A	2.500
4.7	S	T95S475(1)010(2)(3)(4)L	0.5	6	N/A	2.000
6.8	V	T95V685(1)010(2)(3)(4)L	0.7	6	N/A	2.000
10	X	T95X106(1)010(2)(3)(4)L	1.0	6	N/A	1.500
15	B	T95B156(1)010(2)(6)(4)(5)	2.4	6	0.75	0.550
15	X	T95X156(1)010(2)(3)(4)L	1.5	6	N/A	1.000
22	Y	T95Y226(1)010(2)(6)(4)L	2.2	6	N/A	0.600
33	Z	T95Z336(1)010(2)(3)(4)L	3.3	6	N/A	0.400
47	Z	T95Z476(1)010(2)(3)(4)L	4.7	6	N/A	0.400
100	R	T95R107(1)010(2)(3)(4)(5)	10.0	8	0.14	0.075
120	D	T95D127(1)010(2)(6)(4)(5)	12.0	8	0.14	0.085
120	R	T95R127(1)010(2)(6)(4)(5)	12.0	8	0.14	0.070
150	D	T95D157(1)010(2)(3)(4)(5)	15.0	8	0.14	0.075
150	R	T95R157(1)010(2)(3)(4)(5)	15.0	8	0.13	0.065
220	D	T95D227(1)010(2)(6)(4)(5)	22.0	8	0.14	0.065
220	R	T95R227(1)010(2)(3)(4)(5)	22.0	8	0.13	0.055
330	D	T95D337(1)010(2)(6)(4)(5)	33.0	8	0.14	0.065
330	R	T95R337(1)010(2)(3)(4)(5)	33.0	8	0.13	0.045
470	R	T95R477(1)010(2)(6)(4)(5)	47.0	8	0.13	0.045
680	R	T95R687(1)010(2)(6)(4)(5)	68.0	14	0.09	N/A



Solid Tantalum Chip Capacitors,  
TANTAMOUNT<sup>®</sup>, High-Rel COTS, Conformal Coated Case

Vishay Sprague

STANDARD RATINGS						
CAPACITANCE (μF)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μA)	MAX. DF AT + 25 °C 120 Hz (%)	STD. (S) MAX. ESR AT + 25 °C 100 kHz (Ω)	LOW (L) MAX. ESR AT + 25 °C 100 kHz (Ω)
<b>16 WV<sub>DC</sub> AT + 85 °C, 10 WV<sub>DC</sub> AT + 125 °C</b>						
2.2	S	T95S225(1)016(2)(3)(4)L	0.5	6	N/A	3.500
3.3	S	T95S335(1)016(2)(3)(4)L	0.5	6	N/A	2.500
4.7	V	T95V475(1)016(2)(3)(4)L	0.8	6	N/A	2.000
6.8	X	T95X685(1)016(2)(3)(4)L	1.1	6	N/A	1.500
6.8	A	T95A685(1)016(2)(3)(4)(5)	1.1	6	2.8	0.800
10	X	T95X106(1)016(2)(3)(4)L	1.6	6	N/A	1.500
15	B	T95B156(1)016(2)(3)(4)(5)	2.4	6	0.75	0.550
15	Y	T95Y156(1)016(2)(3)(4)L	2.4	6	N/A	0.600
22	B	T95B226(1)016(2)(6)(4)(5)	3.5	6	0.75	0.500
22	Z	T95Z226(1)016(2)(3)(4)L	3.5	6	N/A	0.400
33	Z	T95Z336(1)016(2)(3)(4)L	5.3	6	N/A	0.400
68	R	T95R686(1)016(2)(3)(4)(5)	10.9	6	0.6	0.095
100	C	T95C107(1)016(2)(6)(4)(5)	16.0	8	0.6	0.090
100	D	T95D107(1)016(2)(6)(4)(5)	16.0	8	0.14	0.080
150	D	T95D157(1)016(2)(3)(4)(5)	24.0	8	0.14	0.085
180	R	T95R187(1)016(2)(6)(4)(5)	28.8	8	0.13	0.055
220	R	T95R227(1)016(2)(6)(4)(5)	35.2	8	0.12	0.055
330	R	T95R337(1)016(2)(6)(4)(5)	52.8	14	0.11	0.055
<b>20 WV<sub>DC</sub> AT + 85 °C, 13 WV<sub>DC</sub> AT + 125 °C</b>						
1.5	S	T95S155(1)020(2)(3)(4)L	0.5	6	N/A	3.500
2.2	S	T95S225(1)020(2)(3)(4)L	0.5	6	N/A	3.500
3.3	V	T95V335(1)020(2)(3)(4)L	0.7	6	N/A	3.000
4.7	X	T95X475(1)020(2)(3)(4)L	0.9	6	N/A	1.500
6.8	X	T95X685(1)020(2)(3)(4)L	1.4	6	N/A	1.500
10	Y	T95Y106(1)020(2)(3)(4)L	2.0	6	N/A	1.000
15	Z	T95Z156(1)020(2)(3)(4)L	3.0	6	N/A	0.600
22	Z	T95Z226(1)020(2)(3)(4)L	4.4	6	N/A	0.400
47	R	T95R476(1)020(2)(3)(4)L	9.4	6	0.20	0.110
100	R	T95R107(1)020(2)(6)(4)S	20.0	8	0.14	N/A
120	R	T95R127(1)020(2)(6)(4)(5)	24.0	8	0.14	0.080
150	R	T95R157(1)020(2)(3)(4)(5)	30.0	8	0.14	0.075
<b>25 WV<sub>DC</sub> AT + 85 °C, 17 WV<sub>DC</sub> AT + 125 °C</b>						
0.68	S	T95S684(1)025(2)(3)(4)L	0.5	4	N/A	5.000
1	S	T95S105(1)025(2)(3)(4)L	0.5	4	N/A	3.500
1.5	S	T95S155(1)025(2)(3)(4)L	0.5	6	N/A	3.500
2.2	V	T95V225(1)025(2)(3)(4)L	0.6	6	N/A	2.000
4.7	X	T95X475(1)025(2)(3)(4)L	1.2	6	N/A	1.500
6.8	Y	T95Y685(1)025(2)(3)(4)L	1.7	6	N/A	1.000
10	C	T95C106(1)025(2)(3)(4)(5)	2.5	6	0.57	0.280
10	Y	T95Y106(1)025(2)(3)(4)L	2.5	6	N/A	1.000
15	Z	T95Z156(1)025(2)(3)(4)L	3.8	6	N/A	0.600
33	D	T95D336(1)025(2)(3)(4)(5)	8.3	6	0.26	0.130
33	R	T95R336(1)025(2)(3)(4)(5)	8.3	6	0.25	0.130
47	D	T95D476(1)025(2)(6)(4)(5)	11.8	6	0.26	0.130
47	R	T95R476(1)025(2)(3)(4)(5)	11.8	6	0.20	0.108
68	D	T95D686(1)025(2)(6)(4)(5)	17.0	8	0.26	0.200
68	R	T95R686(1)025(2)(6)(4)(5)	17.0	6	0.20	0.095
100	R	T95R107(1)025(2)(6)(4)(5)	25.0	8	0.20	0.090



<b>STANDARD RATINGS</b>						
CAPACITANCE ( $\mu$ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C ( $\mu$ A)	MAX. DF AT + 25 °C 120 Hz (%)	STD. (S) MAX. ESR AT + 25 °C 100 kHz ( $\Omega$ )	LOW (L) MAX. ESR AT + 25 °C 100 kHz ( $\Omega$ )
<b>35 WV<sub>DC</sub> AT + 85 °C, 23 WV<sub>DC</sub> AT + 125 °C</b>						
0.15	S	T95S154(1)035(2)(3)(4)L	0.5	4	N/A	18.000
0.22	S	T95S224(1)035(2)(3)(4)L	0.5	4	N/A	15.000
0.33	S	T95S334(1)035(2)(3)(4)L	0.5	4	N/A	12.000
0.47	S	T95S474(1)035(2)(3)(4)L	0.5	4	N/A	9.000
0.68	S	T95S684(1)035(2)(3)(4)L	0.5	4	N/A	5.000
1	S	T95S105(1)035(2)(3)(4)L	0.5	4	N/A	3.500
1.5	V	T95V155(1)035(2)(3)(4)L	0.5	6	N/A	3.000
2.2	X	T95X225(1)035(2)(3)(4)L	0.8	6	N/A	2.000
4.7	Y	T95Y475(1)035(2)(3)(4)L	1.6	6	NA	0.800
6.8	Z	T95Z685(1)035(2)(6)(4)L	2.4	6	N/A	0.800
10	Z	T95Z106(1)035(2)(3)(4)L	3.5	6	N/A	0.600
15	D	T95D156(1)035(2)(3)(4)(5)	5.3	6	0.41	0.270
15	R	T95R156(1)035(2)(3)(4)(5)	5.3	6	0.38	0.190
22	R	T95R226(1)035(2)(3)(4)(5)	7.7	6	0.28	0.240
33	R	T95R336(1)035(2)(3)(4)(5)	11.6	6	0.28	0.200
47	R	T95R476(1)035(2)(3)(4)(5)	16.5	6	0.28	0.320
<b>50 WV<sub>DC</sub> AT + 85 °C, 33 WV<sub>DC</sub> AT + 125 °C</b>						
4.7	C	T95C475(1)050(2)(3)(4)(5)	2.4	6	1.4	0.800
6.8	C	T95C685(1)050(2)(3)(4)(5)	3.4	6	0.7	1.300
6.8	D	T95D685(1)050(2)(3)(4)(5)	3.4	6	0.82	0.450
10	R	T95R106(1)050(2)(6)(4)(5)	5.0	6	0.65	0.500
15	R	T95R156(1)050(2)(3)(4)(5)	7.5	6	0.40	0.350
22	R	T95R226(1)050(2)(3)(4)(5)	11.0	6	0.39	0.300

**Notes**

- (1) Capacitance tolerance: K, M
- (2) Termination and packaging: C, E, H, L
- (3) Reliability level: A, S, Z
- (4) Surge current: A, B, S
- (5) ESR: L, S
- (6) Reliability level: A, B, S, Z



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.